

Technical data sheet

Flat angle, asymmetrical, rising, for device installation trunking Rapid 80 type GA-A90170

Item number: 6279523



Flat angle, rising, for changing the direction of the Rapid 80 GA aluminium device installation trunking.

The visible surfaces of the fittings are laminated. The cover must be ordered separately.



Alu Aluminium

EL Anodised

Master data

| | |
|------------------------------------|---------------------------|
| Item number | 6279523 |
| Type | GA-AFS90170EL |
| Description 1 | Flat angle |
| Description 2 | asymmetrical |
| Manufacturer | OBO |
| Dimension | 90x170x300 |
| Colour | aluminium |
| Material | Aluminium |
| Surface | Anodised |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 159.4 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 24,1754 kg CO2e / 1 Piece |


Technical data sheet

Flat angle, asymmetrical, rising, for device installation trunking Rapid 80 type GA-A90170

Item number: 6279523



Dimensions

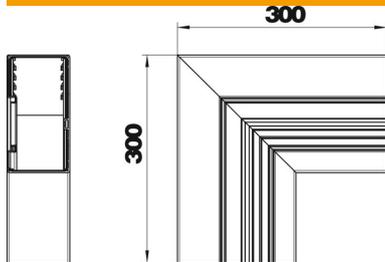

| | |
|--------|--------|
| Length | 300 mm |
| Width | 170 mm |
| Height | 90 mm |

Technical data

| | |
|-----------------------------------|-----------------|
| Number of covers | 1 |
| Version for | Base |
| for duct width | 170 mm |
| for trunking height | 90 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | no |
| Cover width | 76.5 mm |
| Change of direction | Vertical rising |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK10 |
| Symmetrical | no |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -25 °C |
| Angle range, min. | 90 mm |