

# Technical data sheet

## Trunking, type WDK 100230

Item number: 6026338



Wall installation trunking as trunking base with base perforation and matching trunking cover.  
Four cover fixing devices included.  
Lid clamp can be moved along the entire length of the trunking.



**PVC** Polyvinylchloride

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6026338                  |
| Type                               | WDK100230CW              |
| Description 1                      | Wall trunking system     |
| Description 2                      | with base perforation    |
| Manufacturer                       | OBO                      |
| Dimension                          | 100x230x2000             |
| Colour                             | Cream; RAL 9001          |
| Material                           | Polyvinylchloride        |
| Smallest sales unit                | 4                        |
| Unit of quantity                   | Metre                    |
| Weight                             | 338 kg                   |
| Weight unit                        | kg/100 m                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 6,4816 kg CO2e / 1 Meter |


# Technical data sheet

Trunking, type WDK 100230

Item number: 6026338



## Dimensions

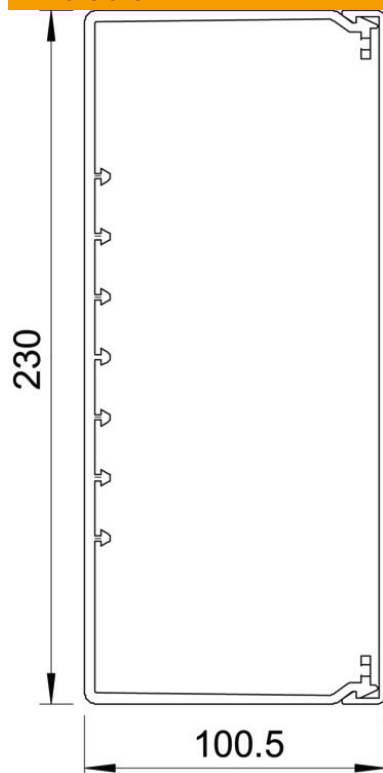

|        |          |
|--------|----------|
| Length | 2,000 mm |
| Width  | 230 mm   |
| Height | 100 mm   |

# Technical data sheet

Trunking, type WDK 100230

Item number: 6026338



## Technical data

|                                                                         |                       |
|-------------------------------------------------------------------------|-----------------------|
| Number of fixed partitions                                              | 0                     |
| Number of cables NYM 3 x 1.5 mm <sup>2</sup> Ø 10.5 mm (without socket) | 113                   |
| Number of cables NYM 3 x 2.5 mm <sup>2</sup> Ø 11.5 mm (without socket) | 148                   |
| Number of cables NYM 5 x 1.5 mm <sup>2</sup> Ø 12.0 mm (without socket) | 87                    |
| Number of insertable partitions                                         | 3                     |
| Version, cable trunking cover                                           | Loose                 |
| Fastening type                                                          | Base perforation      |
| Maintain electrical functions                                           | no                    |
| Halogen-free                                                            | no                    |
| Cable retaining clip                                                    | yes                   |
| Duct connector                                                          | no                    |
| Delivery on a roll                                                      | no                    |
| Usable cross-section                                                    | 19702 mm <sup>2</sup> |
| Protection rating                                                       | IP30                  |
| Protective film                                                         | no                    |
| Protection rating IK code                                               | IK04                  |
| Permitted temperature range, max.                                       | 60 °C                 |
| Permitted temperature range, min.                                       | -5 °C                 |