

# Technical data sheet

External corner, asymmetrical, for device installation trunking Rapid 80 type GA-A90170  
Item number: 6279510



External corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.  
The visible surfaces of the fittings are laminated. The cover must be ordered separately.



**Alu** Aluminium

## Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 6279510                   |
| Type                               | GA-AA90170RW              |
| Description 1                      | External corner           |
| Description 2                      | asymmetrical              |
| Manufacturer                       | OBO                       |
| Dimension                          | 90x170x300                |
| Colour                             | Pure white; RAL 9010      |
| Material                           | Aluminium                 |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 229.2 kg                  |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 30,8204 kg CO2e / 1 Piece |


# Technical data sheet

External corner, asymmetrical, for device installation trunking Rapid 80 type GA-A90170


Item number: 6279510



## Dimensions



|        |        |
|--------|--------|
| Length | 300 mm |
| Width  | 170 mm |
| Height | 90 mm  |

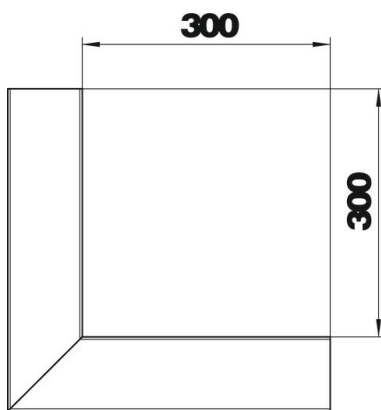

## Technical data

|                                   |          |
|-----------------------------------|----------|
| Number of covers                  | 1        |
| Version for                       | Base     |
| for duct width                    | 170 mm   |
| for trunking height               | 90 mm    |
| Halogen-free                      | yes      |
| Cable retaining clip              | no       |
| Duct connector                    | no       |
| Cover mounting type               | Internal |
| Mounting perforation in base      | no       |
| Cover width                       | 76.5 mm  |
| Protection rating                 | IP30     |
| Protective film                   | yes      |
| Protection rating IK code         | IK10     |
| Symmetrical                       | no       |
| Permitted temperature range, max. | 60 °C    |
| Permitted temperature range, min. | -25 °C   |
| Angle range, min.                 | 90 mm    |