Cover with factory-made beading for toolless mounting and continuous equipotential bonding. Additional locking brackets can be used for shortened covers. Take the details from the mounting instructions into account.

CE

| **St** | Steel |
| **FS** | Strip galvanized |

## Master data

| | |
|---|---|
| Item number | 7218020 |
| Type | PLM LI 100 FS |
| Description 1 | Installation duct lid |
| Description 2 | with fire protection mesh |
| Manufacturer | OBO |
| Dimension | 12x77x2000 |
| Colour | zinc |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 73.5 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,6103 kg CO2e / 1 Meter |
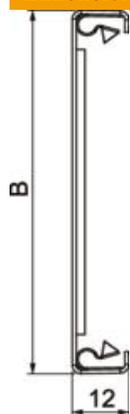
**Dimensions**

| Length | 2,000 mm |
|---|---|
| Dimension B | 76 mm |

**Technical data**

| Type of accessory | Miscellaneous |
|---|---|
| Classification EI − installation duct | 90 |
| Accessories | yes |
| Spare part | no |