

# PLATEO SUN 4

SLI044033NW\_PW

High bay luminaire PLATEO SUN 4, with a power of 205 W, high light efficacy 110 lm/W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. It shines with light of neutral - the most universal colour (4000K). Narrow beam angle 70° gives directional light so that selected surfaces can be better exposed. Designed for suspended mounting.

IP65

IK06




Power	<b>205 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>22600 lm (360°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>70 °</b>
IK	<b>06</b>	Degree of protection (IP)	<b>IP65</b>

## Technical data

Code	SLI044033NW_PW
Power	205 W
Nominal current	920 mA
Voltage	230 V
Energy consumption	205 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power factor	0.9
Useful luminous flux*	22600 lm (360°)
Luminous flux	20500 lm (360°)
Lamp efficacy	110 lm/W
Luminous intensity	14000 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	70 °
RA	80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Warranty	2 years
Lifespan	17000 h
(On/Off)	15000
Housing material	aluminum
IK	06
Degree of protection (IP)	IP65
Colour	Czarny
Dimension (AxBxC)	303x90 mm
For use	Outside
Assembly method	Suspended
Application	Outside
Made in	PRC

## Logistics data


Bulk packaging	5 pcs.
Quantity per pallet	225 pcs.
Gross weight (1 pcs.)	1.38 kg

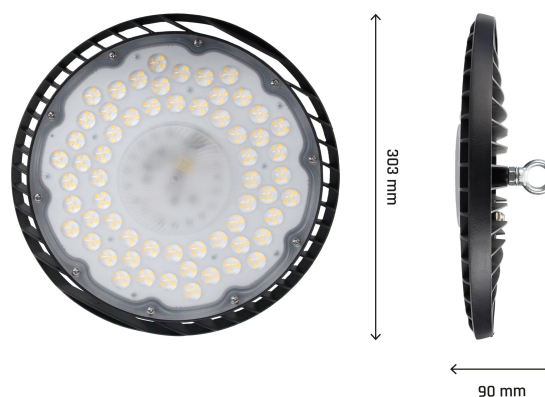


\*applies to the LED source used

## Related documents



 User manual



 Declaration of Conformity



 Photometric file

