


DAMP PROOF FLEX DA IP66









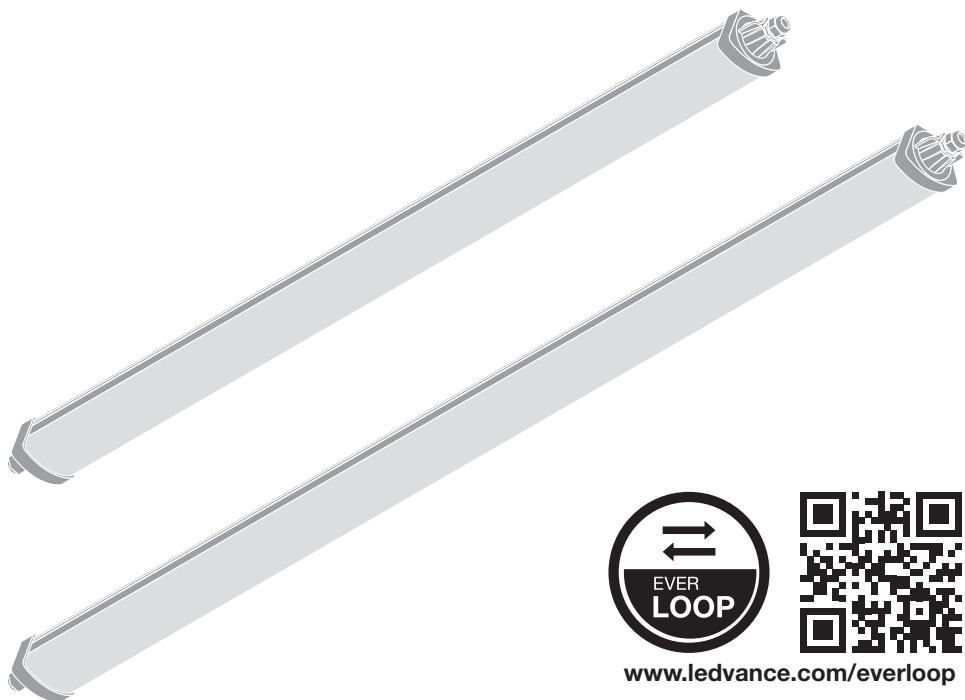



www.ledvance.com/everloop

	EAN	l x w x h [mm]	W	V _{AC}	Hz	lm	lm/W
DP FLEX DA 1200 P 34W 830 IP66	4099854637636	1320 x 88 x 73	34	220-240V	0/50/60Hz	5500	162
DP FLEX DA 1200 P 34W 840 IP66	4099854637667	1320 x 88 x 73	34	220-240V	0/50/60Hz	5600	162
DP FLEX DA 1200 P 34W 865 IP66	4099854637681	1320 x 88 x 73	34	220-240V	0/50/60Hz	5600	162
DP FLEX DA 1500 P 42W 830 IP66	4099854637711	1620 x 88 x 73	42	220-240V	0/50/60Hz	6800	162
DP FLEX DA 1500 P 42W 840 IP66	4099854637742	1620 x 88 x 73	42	220-240V	0/50/60Hz	6900	162
DP FLEX DA 1500 P 42W 865 IP66	4099854637766	1620 x 88 x 73	42	220-240V	0/50/60Hz	6900	162

	EAN	K	IP	IK	∠	R _a	∅ (°C)	PF	⊿
DP FLEX DA 1200 P 34W 830 IP66	4099854637636	3000	66	08	120°	≥ 80	-20...+50	≥ 0.9	1.4kg
DP FLEX DA 1200 P 34W 840 IP66	4099854637667	4000	66	08	120°	≥ 80	-20...+50	≥ 0.9	1.4kg
DP FLEX DA 1200 P 34W 865 IP66	4099854637681	6500	66	08	120°	≥ 80	-20...+50	≥ 0.9	1.4kg
DP FLEX DA 1500 P 42W 830 IP66	4099854637711	3000	66	08	120°	≥ 80	-20...+50	≥ 0.9	1.6kg
DP FLEX DA 1500 P 42W 840 IP66	4099854637742	4000	66	08	120°	≥ 80	-20...+50	≥ 0.9	1.6kg
DP FLEX DA 1500 P 42W 865 IP66	4099854637766	6500	66	08	120°	≥ 80	-20...+50	≥ 0.9	1.6kg

DAMP PROOF FLEX DA IP66

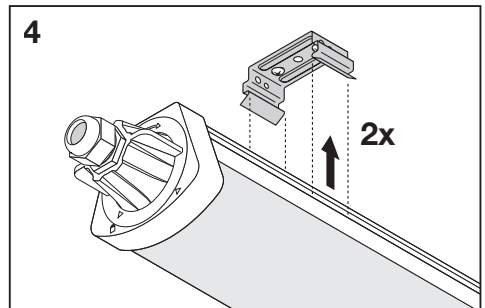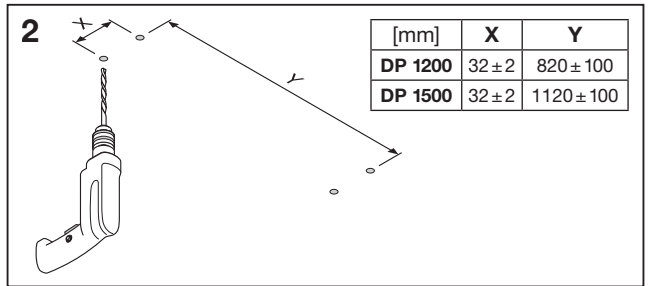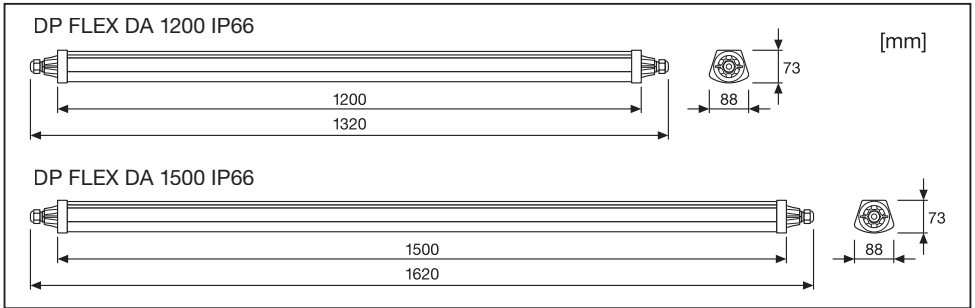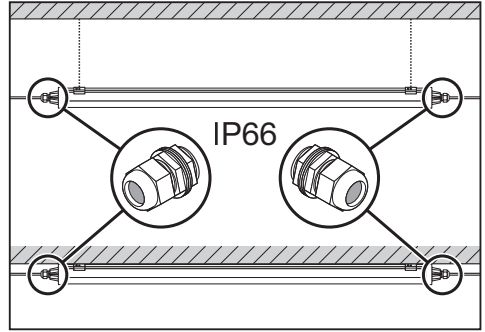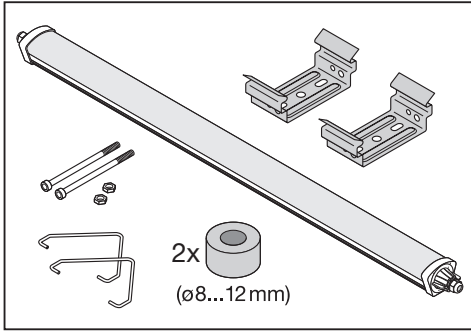

DAMP PROOF FLEX DA IP66

