


## Niloé™ IP44 plate

Cat. No(s): NP116BK/MG/WH



NP116..


### 1. USE

Frame plate white color supplied with translucent cover for fitting on Niloé mechanisms.

### 2. RANGE

| Description | White   | Medium Grey | Black   |
|-------------|---------|-------------|---------|
| IP44 plate  | NP116WH | NP116MG     | NP116BK |

### 3. DIMENSIONS (mm)

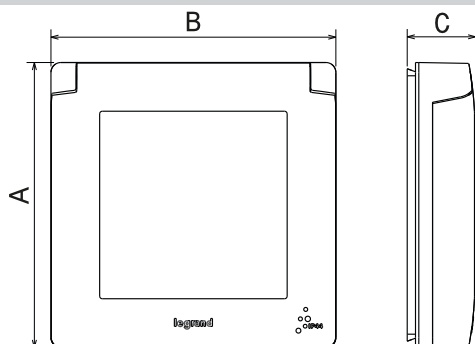

| A    | B    | C    |
|------|------|------|
| 75.8 | 75.8 | 23.2 |

### 4. MOUNTING

The plates snap onto the socket adapter or the switch cover. In case of the sockets, the socket cover clamp the frame.

### 5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics  
180° opening capacity of the cover  
Impact tests: IK 04  
Penetration against solid bodies and liquids: IP 44

■ 5.2 Material characteristics  
Plates: ABS  
Shutter for plate: PC  
UV resistant  
Halogen free  
Sealing material: SEBS  
Self-extinguishing: 650° C / 30 s

■ 5.3 Climatical characteristics  
Storage temperature: - 10° C to +70° C  
Usage temperature: - 5° C to + 40° C

### 6. CLEANING

Surface cleaning with a cloth. Do not use: acetone, tar remover, trichloroethylene.

- 6.1 Resistance to the following cleaning substances
- Hexane
  - Methylated spirit,
  - Soapy water,
  - Diluted ammonia,
  - Diluted pure bleach 10%,
  - Glass cleaning product,
  - Pre-impregnated wipes.

**Caution:** Always test before using other special cleaning products.

### 7. SPECIAL USE

The plates must not be painted.

### 8. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. No NP116BK/MG/WH) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: [www.legrand.com/ecatalogue](http://www.legrand.com/ecatalogue)