


Céliane™ 2 P+E socket outlets

Cat. No(s): CM0119



CM0119


1. USE

Shuttered 2 P+E socket outlets.
Can be flush-mounted or surface-mounted in 40 mm deep boxes.

2. RANGE

Description	Cat. No.
2 P+E socket	CM0119

3. OVERALL DIMENSIONS (mm)

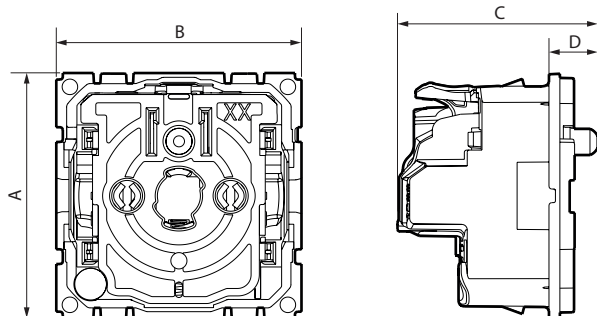

A	B	C	D
45	45	33.6	4.6

4. CONNECTION

Type of terminals: automatic with color marking
Terminal capacity: 2 x 2.5 mm²
Stripping length: 12 mm
Compatible with flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact test: IK 04
Protection against solids and liquids bodies: IP 20

■ 5.2 Material characteristics

Mechanism casing: PC

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: 16 A
Frequency: 50/60 Hz

■ 5.4 Climate characteristics

Usage temperature: -5°C to +50°C
Storage temperature: -10°C to +70°C

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.