

Detachment of knock-outs and flange knock-outs

Working instructions



Tools needed



Screwdriver or chisel

Hammer





Detachment of knock-outs

Hitting points:

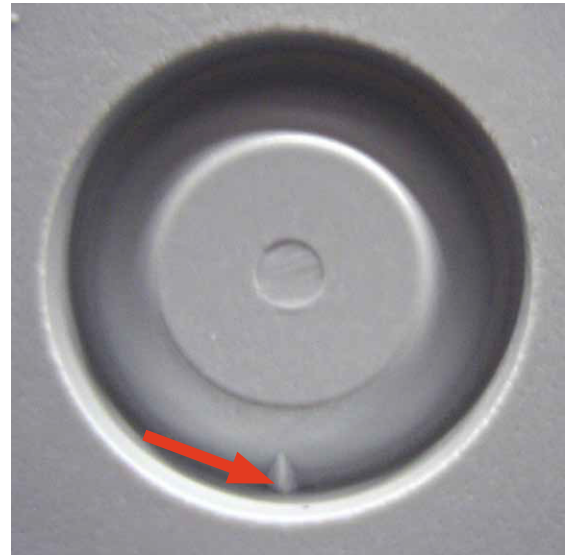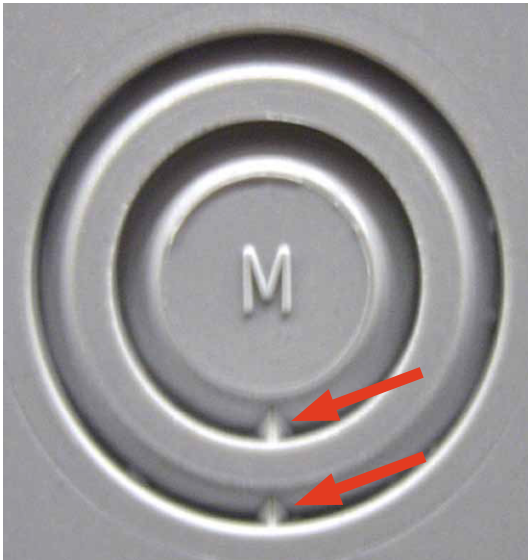


Step 1

Step 2

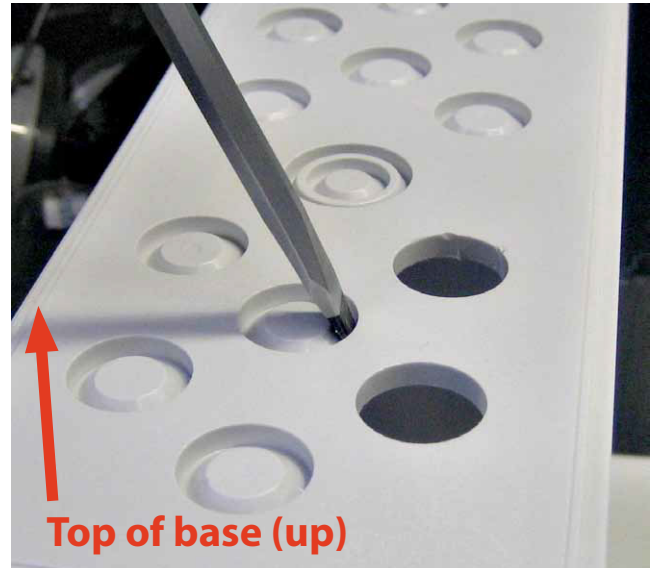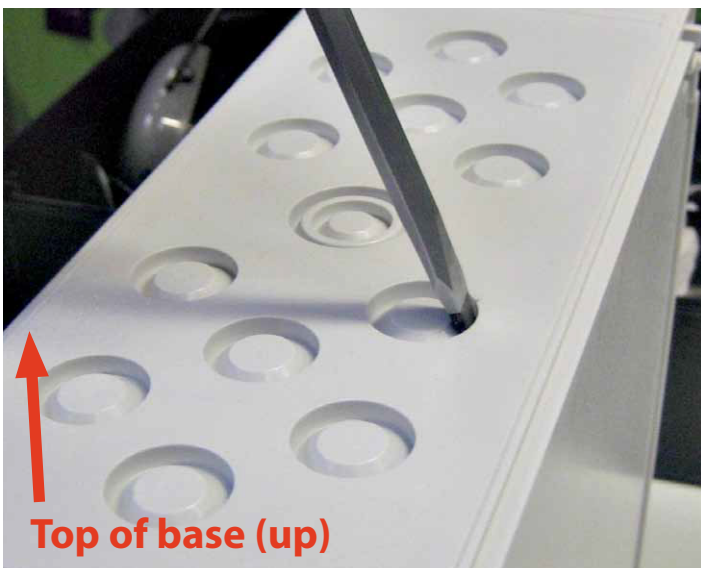


Detachment of flange knock-outs

Hitting points:

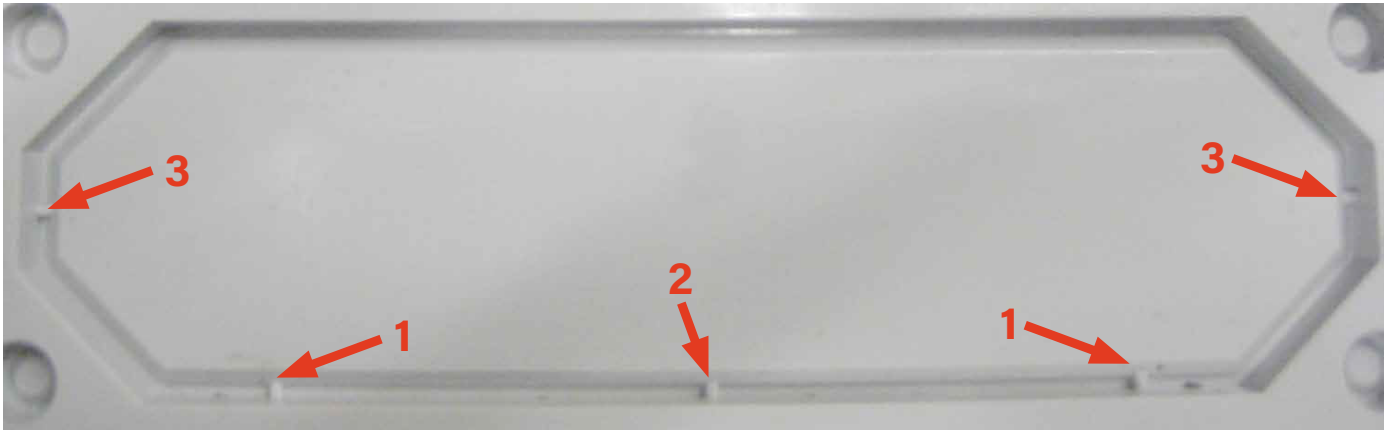

Step 1

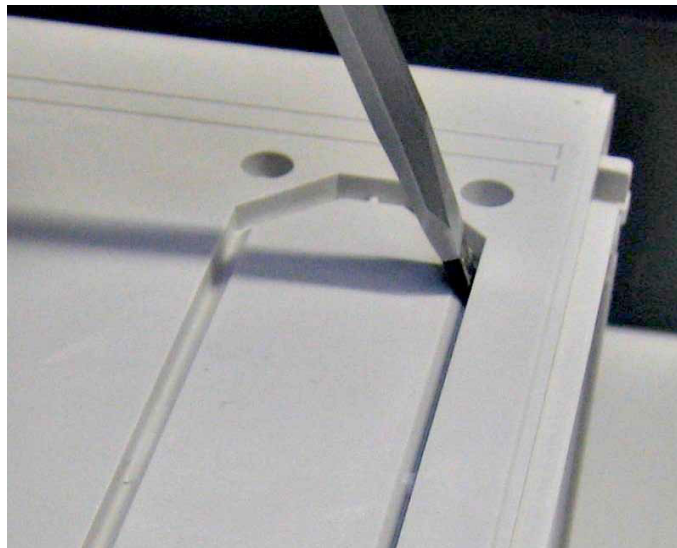

Step 2



Step 3



Step 4



Legrand Finland Oy
Linnoitustie 11
02600 Espoo, Finland
Tel: +358 20 486 5010
www.legrand.fi

