

22260301	DATA SHEET	
Valid from: 19.12.2023	AB-C4-M12MA-(L*)PUR	

Product description

- Sensor/actuator cable, 4-pol, PUR halogen-free, black
- Angled M12-plug on free conductor end



General characteristics

Number of pins	4
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -40 °C to +80 °C (-40°F to 176°F) (cable, fixed installation) -25 °C to +80 °C (-13°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260301	AB-C4-M12MA-2,0PUR	2	angled
22260146	AB-C4-M12MA-3,0PUR	3	angled
22260302	AB-C4-M12MA-5,0PUR	5	angled
22260303	AB-C4-M12MA-10,0PUR	10	angled
22262000	AB-C4-M12MA-15,0PUR	15	angled
22260148	AB-C4-M12MA-30,0PUR	30	angled

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	250 V
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Mechanical properties

Plug

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260301EN Version: 06	Page 1 of 3
---	---------------------------------------	-------------

22260301	DATA SHEET	
Valid from: 19.12.2023	AB-C4-M12MA-(L*)PUR	

Line

Cable construction	4 x AWG22/42
Signal line, construction	42 x 0,1 mm
Conductor cross-section	0,34 mm ²
Conductor diameter including isolation	1,27 mm ± 0,02 mm
Cable outer diameter D	4,7 mm ± 0,15mm
Insulation color	white, brown, blue, black
Sheath color	grey-black, RAL 7021
Number of bending cycles	10.000.000
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexing	10 x D
Minimum bending radius, drag chain use	10 x D
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	10 m/s ²
Cable weight	30 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	≥ 1 GΩ*km
Conductor resistance	≤ 78 Ω/km
Flame resistance	acc. to UL 758/1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815 DIN EN 50267-2-1
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes good resistant to acids, lyes and solvents limited UV resistance acc. to DIN EN ISO 4892-2-A low adhesion abrasion resistant




Standards/Approvals

Product standard, M12 connector	IEC 61076-2-101
UL-Listed, E-File	E249137

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260301EN Version: 06	Page 2 of 3
---	---------------------------------------	-------------

22260301	DATA SHEET	
Valid from: 19.12.2023	AB-C4-M12MA-(L*)PUR	

Technical drawing

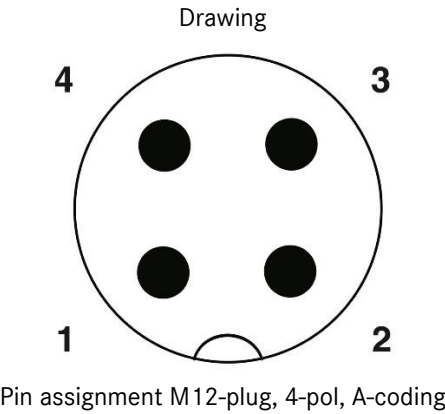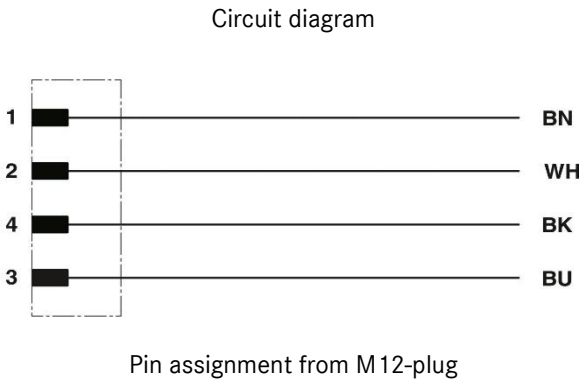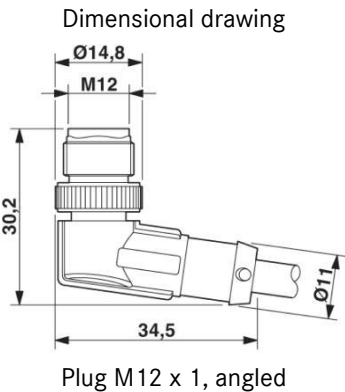

Application range

For increased mechanical load and rough operating conditions

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260301EN Version: 06	Page 3 of 3
---	---------------------------------------	-------------