

22260347	DATA SHEET	
Valid from: 21.12.2023	AB-C4-M12MS-(L*)PUR-M8FS	

Description

- Sensor / actuator cable, 4-pins, PUR halogen-free, black grey RAL 7021
- Straight M12-plug on straight M8-jack



General characteristics

Number of pins	4
Ambient temperature	-40 to +80 °C (cable, fixed installation) -25 to +80 °C (cable, movable installation)
Degree of protection	IP 65 / IP 67 / IP 68
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector) 0,2 Nm (M8-connector)

Variants

Material	Description	Length (L*) [m]	Configuration
22260347	AB-C4-M12MS-0.3PUR-M8FS	0.3	Straight – straight
22260349	AB-C4-M12MS-0.6PUR-M8FS	0.6	Straight – straight
22260350	AB-C4-M12MS-1.0PUR-M8FS	1	Straight – straight
22260348	AB-C4-M12MS-2.0PUR-M8FS	2	Straight – straight
22260924	AB-C4-M12MS-5,0PUR-M8FS	5	Straight – straight
22262232	AB-C4-M12MS-10,0PUR-M8FS	10	Straight - straight

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	60 V DC / 48 V AC
Rated current at 40 °C	4 A
Over voltage category	II
Pollution degree	3

Mechanical properties

Plug & jack

Inflammability class according to UL 94	HB
Contact, material	CuSn
Contact surface, material	Ni / Au
Contact carrier, material	TPU GF
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Seal, material	NBR

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260347EN Version: 05	Page 1 of 3
---	---------------------------------------	-------------

22260347	DATA SHEET	
Valid from: 21.12.2023	AB-C4-M12MS-(L*)PUR-M8FS	

Line

Cable construction	4x AWG24/32
Conductor diameter including isolation	1.17 mm $\pm$ 0.02 mm
Cable outer diameter	4.4 mm $\pm$ 0.15 mm
Core identification	Brown, White, Blue, Black
Sheath colour	Black grey, similar to RAL 7021
Bending radius	44 mm
Number of bending cycle	10 000 000
Traveling distance	10 m
Travel speed	3 m/s
Acceleration	5 m/s ²
Cable weight	23 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Flame resistance	Acc. UL 758/1581 FT2DIN EN 60332-2-2 (20 s)
Halogen-free	Acc. DIN VDE 0472 part 815





Standards / Approvals

Product standard, M12 connector	IEC 61076-2-101
Product standard, M8 connector	IEC 61076-2-104
UL-Listed, E-File	E249137

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260347EN Version: 05	Page 2 of 3
---	---------------------------------------	-------------

22260347	DATA SHEET	
Valid from: 21.12.2023	AB-C4-M12MS-(L*)PUR-M8FS	

Technical drawing

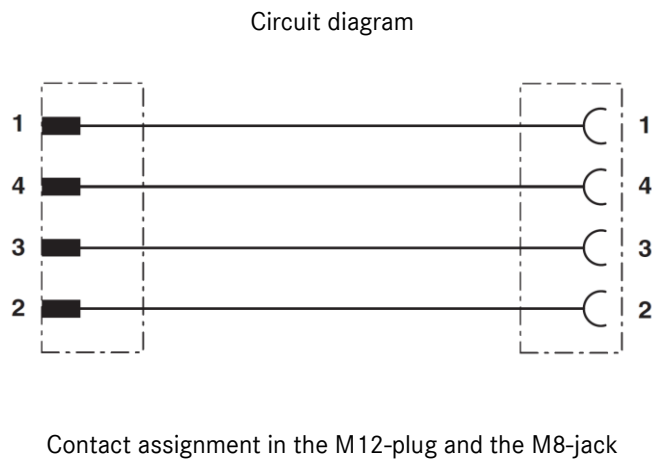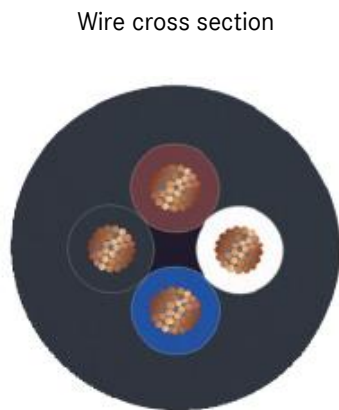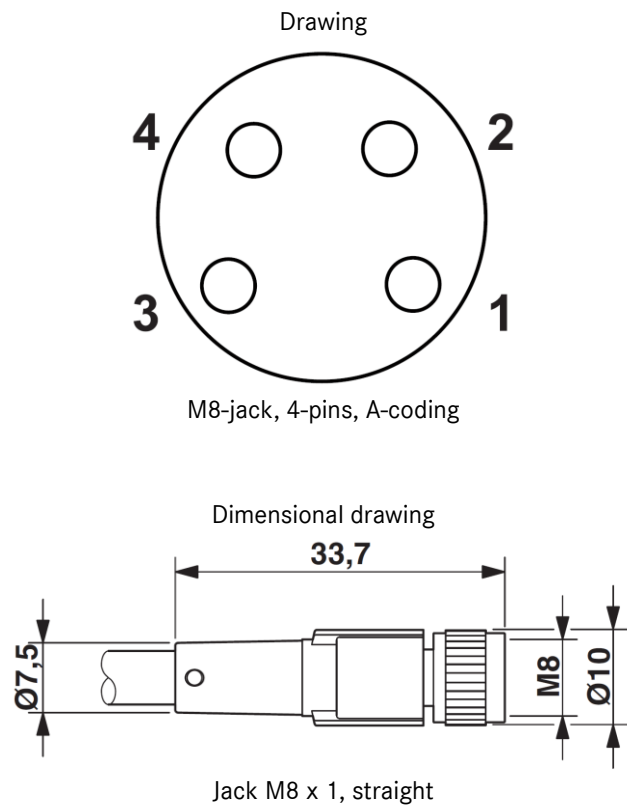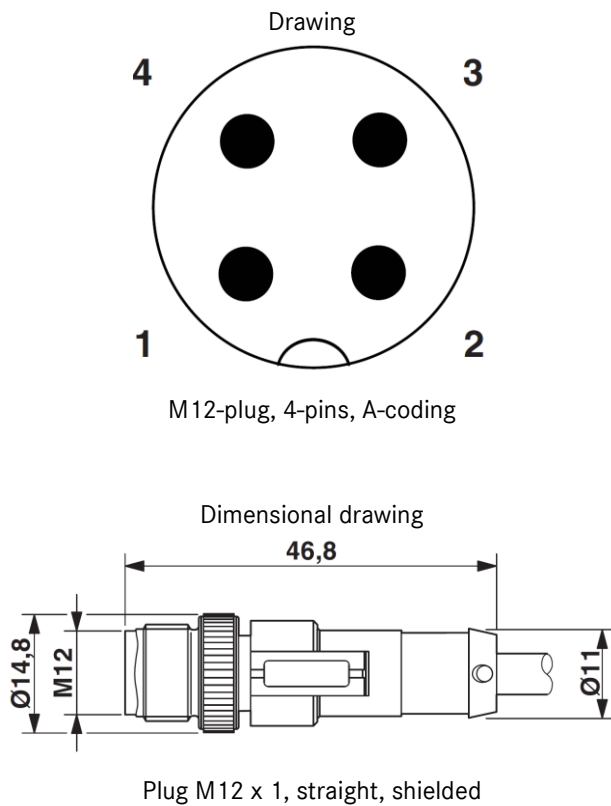

Application range

Automation, Tool shop, Mechanical Engineering and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260347EN Version: 05	Page 3 of 3
---	---------------------------------------	-------------