

22260589	DATA SHEET	
Valid from: 10.01.2024	AB-C5-(L*)PUR-AD-2L	

Product description

- Sensor/actuator cable, 5-pins, PUR halogen-free, black
- Free conductor end on valve connector AD (pressure switch)
- 2 LEDs



General characteristics

Number of pins	5
Ambient temperature	-20 °C to +85 °C (-4 °F to 185 °F) (valve connector) -40 °C to +80 °C (-40 °F to 176 °F) (cable, fixed installation) -20 °C to +80 °C (-4 °F to 176 °F) (cable, movable installation)
Degree of protection	IP 65 / IP 67
Tightening torque	0,6 Nm (valve-connector)

Variation

Article number	Description	Length [m]	Configuration
22260589	AB-C5-2,0PUR-AD-2L	2	AD (pressure switch)
22260590	AB-C5-5,0PUR-AD-2L	5	AD (pressure switch)
22260591	AB-C5-10,0PUR-AD-2L	10	AD (pressure switch)
22260595	AB-C5-20,0PUR-AD-2L	20	AD (pressure switch)

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	24 V
Rated current	4 A
Overvoltage category	III
Pollution degree	3

Mechanical properties

Valve connector

Inflammability class in accordance with UL 94	V0
Contact, material	CuSn
Contact insert, material	PA 6.6
Contact surface, material	Sn
Housing	TPU
Seal, material	TPU (seal injected)

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260589EN Version: 05	Page 1 of 3
---	---------------------------------------	-------------

22260589	DATA SHEET	
Valid from: 10.01.2024	AB-C5-(L*)PUR-AD-2L	

Line

Cable construction	5 x AWG20/28
Signal line, construction	28 x 0,15 mm
Conductor cross-section	0,50 mm ²
Conductor diameter including isolation	1,5 mm ± 0,05 mm
Cable outer diameter	5,3 mm ± 0,2 mm
Insulation color	black 1, black 2, black 3, black 4, green/yellow
Sheath color	grey-black, RAL 7021
Number of bending cycles	15.000.000
Bending radius	50 mm
Traveling distance	0,9 m
Traveling speed	5 m/s
Acceleration	30 m/s ²
Cable weight	44,8 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	min. 20 MΩ*km
Conductor resistance	39 Ω/km (at 20 °C)
Flame resistance	acc. to UL-Style 20549
Halogen-free	acc. to DIN VDE 0472 Part 815
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	largely oil-resistant limited UV resistance acc. to DIN EN ISO 4892-2-A resistant to hydrolysis and microbes good resistant to acids, lyes and solvents

Standards/Approvals


Product standard, valve-connector	EN 175301-803
-----------------------------------	---------------

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260589EN Version: 05	Page 2 of 3
---	---------------------------------------	-------------

22260589	DATA SHEET	
Valid from: 10.01.2024	AB-C5-(L*)PUR-AD-2L	


Technical drawing

Drawing




Valve connector, type AD

Circuit diagram

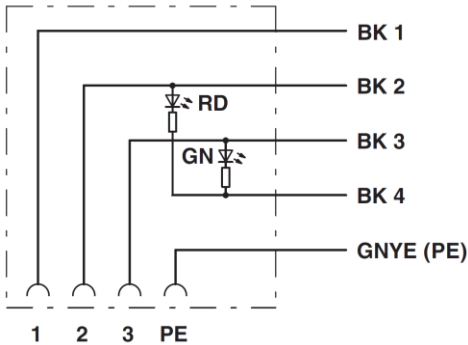


Pin assignment of valve connector

Dimensional drawing

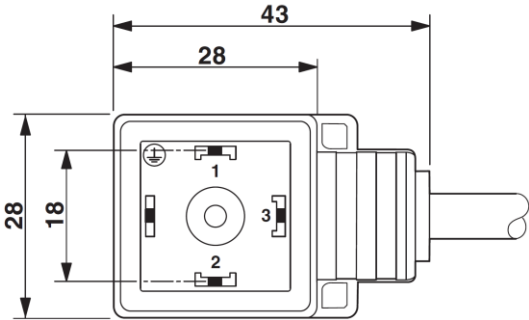


Valve connector, type AD

Dimensional drawing

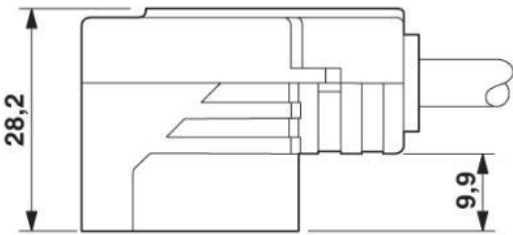

Valve connector, type AD, side view

Wire cross section



Application range

Automation, Tool shop, Mechanical Engineering and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260589EN Version: 05	Page 3 of 3
---	---------------------------------------	-------------