

22260014	DATA SHEET	
Valid from: 17.09.2018	AB-B8-M12-8-5,0PUR	

Description

- Sensor/actuator box
- Connection methods: rapid interlock without LED master cable, markers and single-assigned slots
- slots: 8, cable length: 5 m



Number of slots:	8
Nominal voltage U_N :	120 V
Max. current carrying capacity per path:	2 A
Total current:	± 12 A
Connection type:	Individual wires
Current carrying capacity per slot:	4 A
Number of poles:	4
Degree of protection:	IP65/IP67/IP69K
Status display:	no
Inflammability class acc. to UL 94:	V0
Contact surface material:	Gold-plated
Material, O-ring:	NBR
Material of the moulding mass:	PUR
Material of threaded sleeve:	Zinc die-cast
Material of threaded sleeve surface:	Nickel-plated
Tightening torque slot sensor/actuator cable:	0.4 Nm
Tightening torque screw plug:	0.4 Nm


Conductor data

Cable types:	Master cable suitable for flexible cable conduit
Outer diameter:	8.5 mm
Conductor structure, voltage supply:	42x0.15 mm
Conductor structure, signal line:	19x0.15 mm
AWG power supply:	19
AWG signal line:	22
Power supply cross section:	3x0.75 mm ²
Signal line cross section:	8x0.34 mm ²
Max. bending cycles:	1500000
Traversing path:	2 m
Traversing rate:	2 m/s
Slot/position = Wire color or connection:	1 / 4 (A) = WH



Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB22260014EN Version: 04	Page 1 of 3
---	---------------------------------------	-------------

22260014	DATA SHEET	
Valid from: 17.09.2018	AB-B8-M12-8-5,0PUR	

Technical drawing

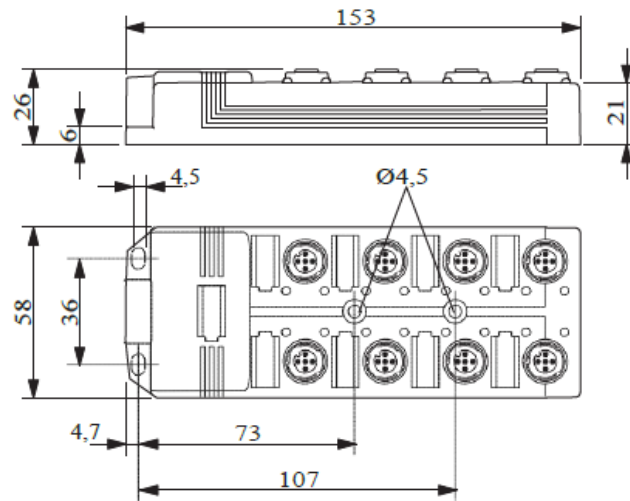



Circuit diagram

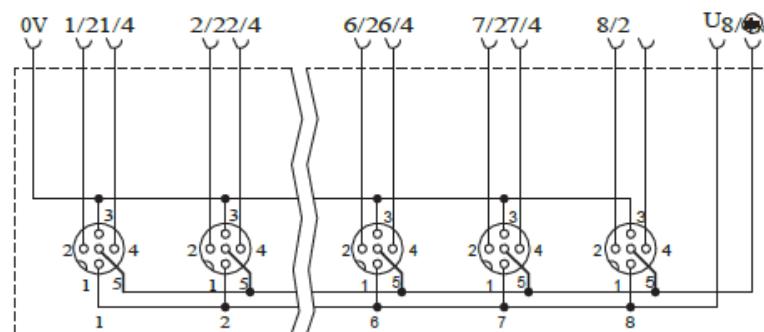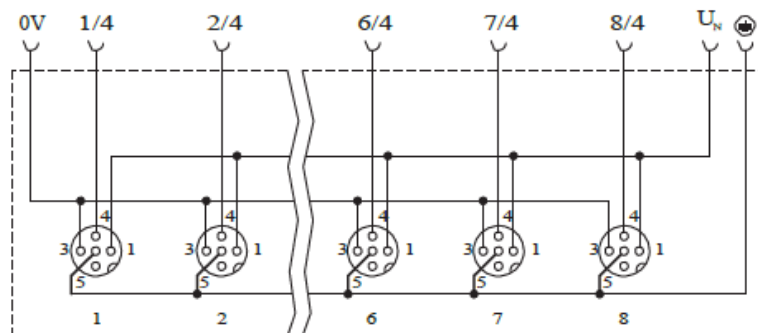

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB22260014EN Version: 04	Page 2 of 3
---	---------------------------------------	-------------

22260014	DATA SHEET	
Valid from: 17.09.2018	AB-B8-M12-8-5,0PUR	

Schema drawings



Pin assignment

Slot/ position = Wire color or connection

1 / 4 (A) = WH
 2 / 4 (A) = GN
 3 / 4 (A) = YE
 4 / 4 (A) = GY
 5 / 4 (A) = PK
 6 / 4 (A) = RD
 7 / 4 (A) = BK
 8 / 4 (A) = VT
 1-8 / 1 (+ 120 V) = BN
 1-8 / 3 (0 V) = BU
 1-8 / 5 (PE) = GN/YE

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: FELI1/PDP Released: IVSE1/PDP	Document: DB22260014EN Version: 04	Page 3 of 3
---	---------------------------------------	-------------