

63207037	DATA SHEET
Valid from: 09.02.2024	Tube cable lug V2A


Stainless steel cable lug for high temperature applications.

Material: Stainless Steel V2A

Technical Features:

Application	For stranded and multi-stranded Copper conductors (class 2 and 5)
Cross section	0,5 up to 16mm ²
Mounting hole	M4 up to M8
Temperature range	up to +400°C

Technical drawing:

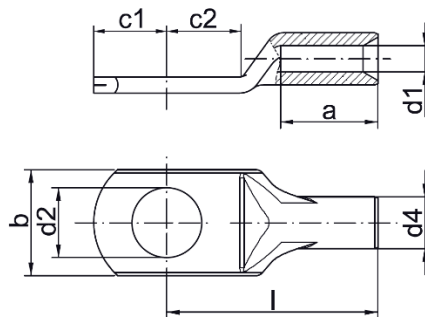

Dimension table:

Part No.	Nominal cross-section mm ²	Screw hole Ø	Dimension mm							
			d1	a	b	d2	d4	c1	c2	l
63207037	0,5 - 1	M4	1,6	6	6,5	4,3	3,2	4,5	4,5	13
63207038		M5	1,6	6	7,5	5,3	3,2	5,0	5,5	14
63207039	1,5 - 2,5	M4	3,0	8	9,0	4,3	5,0	5,0	5,5	17
63207041		M5	3,0	8	9,0	5,5	5,0	5,0	6,0	17
63207042		M6	3,0	8	9,5	6,5	5,0	6,5	6,5	19
63207043	4 - 6	M4	4,0	9	9,0	4,3	6,0	5,0	5,5	18
63207044		M5	4,0	9	9,5	5,5	6,0	6,0	6,0	19
63207045		M6	4,0	9	10,0	6,5	6,0	7,0	6,5	19
63207046	10	M5	5,0	10	12,5	5,5	8,0	6,5	7,5	22
63207047		M6	5,0	10	12,5	6,5	8,0	6,5	7,5	22
63207048		M8	5,0	10	15,0	8,5	8,0	9,0	10,0	25
63207049	16	M5	6,0	13	12,0	5,5	8,0	5,5	6,5	28
63207051		M6	6,0	13	12,0	6,5	8,0	6,0	7,5	28
63207052		M8	6,0	13	15,0	8,5	8,0	8,5	9,5	29

Commodity product, not a Lapp product.

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Document: DB63207037EN Version: 00	Page 1 of 1
---------------------------------------	-------------