

61742400	DATA SHEET
Valid from: 13.03.2026	Shrink tube PROTECT

Shrink tube for industrial applications:
For electrical insulation, Strain relief, wire bundling and protection.



Material: Polyolefin


Technical features:

Shrink ratio: 2:1
 Shrink temperature: >90°C
 Temperature range: -55°C bis +135°C

Color: black
green/yellow

Additional features:

Tensile strength: 13 N/mm²
 Elongation at break: 300%
 Longitudinal change: -10% up to +1%
 Dielectric strength: 20 kV/mm
 Volume resistivity: 10¹⁴ Ω/cm
 Flammability: acc. to UL 224

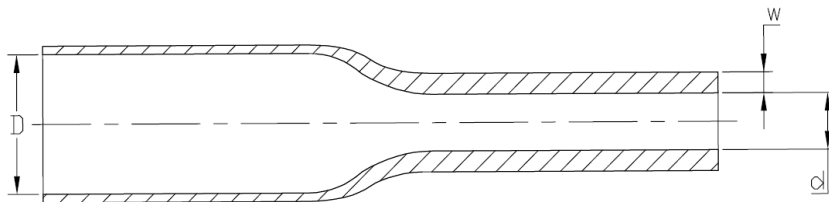

Dimensions:

Part No.	Size D inch	Inner Diameter mm		Recovered wall thickness w mm	VPE
		supplied D	recovered d		
Box					
black					
61742423	3/64	1,2	0,6	0,41	12m
61742424	1/16	1,6	0,8	0,43	12m
61742425	3/32	2,4	1,2	0,51	12m
61742426	1/8	3,2	1,6	0,51	12m
61742427	3/16	4,8	2,4	0,51	10m
61742428	1/4	6,4	3,2	0,65	8m
61742429	3/8	9,5	4,8	0,65	7m
61742430	1/2	12,7	6,4	0,65	6m
61742431	3/4	19,1	9,5	0,77	5m
61742433	1	25,4	12,7	0,89	3m

61742400	DATA SHEET
Valid from: 13.03.2026	Shrink tube PROTECT

Pieces					
black					
61742400	3/64	1,2	0,6	0,41	50 x 1,00m
61742401	1/16	1,6	0,8	0,43	50 x 1,00m
61742402	3/32	2,4	1,2	0,51	50 x 1,00m
61742403	1/8	3,2	1,6	0,51	50 x 1,00m
61742404	3/16	4,8	2,4	0,51	50 x 1,00m
61742405	1/4	6,4	3,2	0,65	25 x 1,00m
61742406	3/8	9,5	4,8	0,65	25 x 1,00m
61742407	1/2	12,7	6,4	0,65	25 x 1,00m
61742408	3/4	19,1	9,5	0,77	25 x 1,00m
61742409	1	25,4	12,7	0,89	15 x 1,00m
Green / yellow					
61742416	1/8	3,2	1,6	0,51	50 x 1,00m
61742417	3/16	4,8	2,4	0,51	50 x 1,00m
61742418	1/4	6,4	3,2	0,65	25 x 1,00m
61742419	3/8	9,5	4,8	0,65	25 x 1,00m
61742420	1/2	12,7	6,4	0,65	25 x 1,00m
61742421	3/4	19,1	9,5	0,77	25 x 1,00m
61742422	1	25,4	12,7	0,89	15 x 1,00m

Commodity product, not a Lapp product.