


## DATA SHEET

### Head for hammering the earth rod SDS MAX

#### Product code

222411

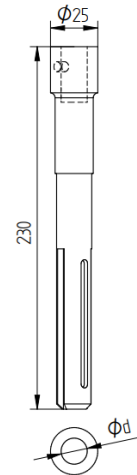

#### Technical description

Connector for cross-connection and T-type connection of  $\varnothing(8-10)$ mm wire for lightning protection, earthing and equipotential bonding system. Mounting by means of 4pcs M8x25 hexagon screws. Maximum lightning current carrying capacity 50kA.

#### Technical data

<b>Material</b>	St 40CR
<b>Weight (1 unit)</b>	0,26 kg
<b>In accordance with the standard</b>	EN-62305
<b>Meets the requirements of the standard</b>	EN 62561
<b>Ean code</b>	5903699801734
<b>Customs code</b>	83024190

Due to continuous technological development, the company reserves the right to change the technical parameters of the products.  
The illustrations shown are not binding.