


## DATA SHEET

### Isolated air-termination mast for conductor L-5000mm

#### Product code

595019

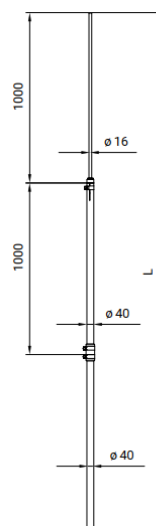

#### Technical description

Connector for cross-connection and T-type connection of  $\varnothing(8-10)$ mm wire for lightning protection, earthing and equipotential bonding system. Mounting by means of 4pcs M8x25 hexagon screws. Maximum lightning current carrying capacity 50kA.

#### Technical data

|                                               |                                               |
|-----------------------------------------------|-----------------------------------------------|
| <b>Material</b>                               | GFK; Stainless steel, Inox V2A; Aluminum, Alu |
| <b>Weight (1 unit)</b>                        | 5,5 kg                                        |
| <b>In accordance with the standard</b>        | EN-62305                                      |
| <b>Meets the requirements of the standard</b> | EN 62561-8                                    |
| <b>Ean code</b>                               | 5903699804834                                 |
| <b>Customs code</b>                           | 74111010                                      |

Due to continuous technological development, the company reserves the right to change the technical parameters of the products.  
The illustrations shown are not binding.