


ETE09

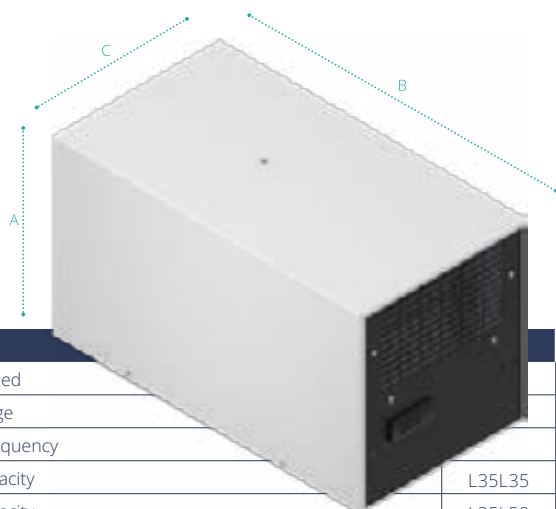

CODE		M.U.	ETE09012207000	ETE09U12207000	ETE09012287000	
UL Recognized			--	✓	--	
Rated Voltage		V, ~	230, 1	230, 1	400, 2	460, 2
Nominal Frequency		Hz	50/60	50/60	50	60
Cooling Capacity	L35L35	W	900	900	900	
Cooling Capacity	L35L50	W	760	760	760	
Power Consumption	L35L50	W	630	630	630	
Current consumption	CE, L35L35	A	3,2	--	1,8	
	UL, L45L55	A	--	4	--	
Start-up current		A	15	15	31	
Internal operating temp..	min/max	°C	+25 / +45	+25 / +45	+25 / +45	
External operating temp.	min/max	°C	+20 / +55	+20 / +55	+20 / +55	
Internal circuit protection degree	CE	IP	54	54	54	
	UL	Type	--	--	--	
External sound pressure		dB(A)	67	67	67	
Height (A)		mm	335	335	335	
Width (B)		mm	600	600	600	
Depth (C)		mm	325	325	325	
Weighth		kg	31,5	31,5	33	