




ALFATORR14


ROOF FAN

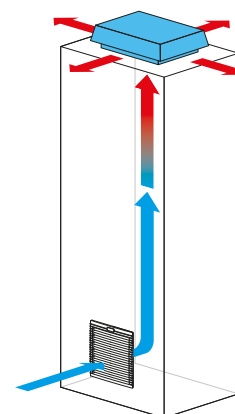

IP44			ALFATORRMETB	ALFATORR1450B	ALFATORR1451B
Air flow rate, free blow	m³/h		-	1500 / 1550	
Air flow rate with inlet filter	m³/h		-	900 / 950	
IP54			ALFATORRMETBF	ALFATORR1450BF	ALFATORR1451BF
Air flow rate, free blow	m³/h		-	1200 / 1240	
Air flow rate with inlet filter	m³/h		-	720 / 760	
Power supply		V ph Hz	-	230 1 50/60	115 1 50/60
Dimensions WxDxH	IP44	mm	540x390x128		
	IP54		540x390x150		
Power consumption	W		-	160 / 215	
Current consumption	A		-	0.70 / 0.98	1.40 / 1.96
Overcurrent protection	-		-	Thermal	
Electrical connection	-		-	3-pole terminal	
Duty cycle	-		-	100%	
Operating temperature	°C (°F)		-20 / +50 (-4 / +122)		
Protection class	-		-	Class I	
Noise level	dB (A)		-	74 / 75	
Flow direction	-		-	Inside-out	
Bearing	-		-	Ball	
Service life (at 40°C)	hrs		-	50 000	
Material	-		Sheet steel powder coated RAL7035		
Gasket	-		Self-adhesive		
Weight (with packaging)	kg		5.2 (5.5)	11.3 (12.3)	
Package dimensions	mm		550x400x140		
Mounting	-		Screws		
Conformity/Certifications	-		CE		

Accessories

Thermostat 0-60°C, NO contact	THV2
Inlet filter	ATV5000
Spare filter mat (for IP54 version)	ALFAFT15
Fan speed controller	FSC1

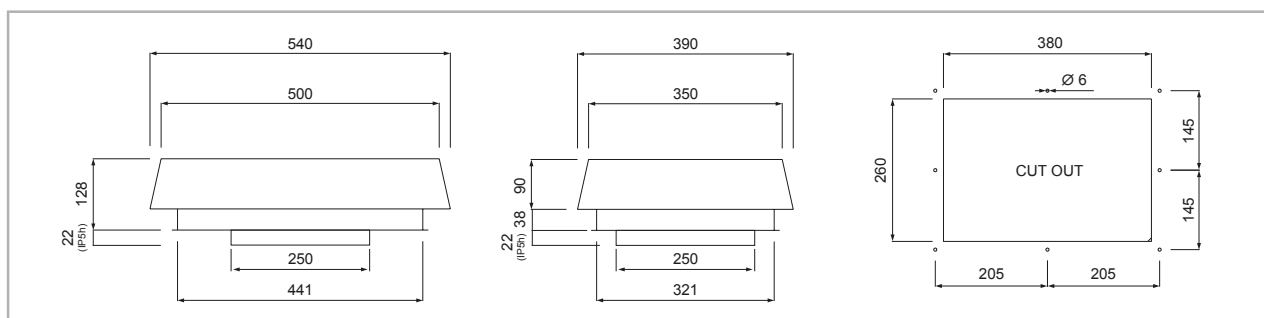

Specifications, values and drawings are subject to change without notice.