


|                        |                                                                                                                                                                                                                                                                  |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>2412-srw</b>                                                                                                                                                                                                                                                  |
| article description    | <b>Taurus2 rubber safety connector lid fb bulge IP54 (black/red)</b>                                                                                                                                                                                             |
| description long       | Safety connector series Taurus2 - rubber with hinged lid<br>color (housing/ring/cover): black/red/red, with sealing bulge<br>material (housing/contact carrier): TPE/PA6<br>earthing system: French/Belgian<br>16A/ 250V AC / 3p (2P+E), protection rating: IP54 |
| GTIN (EAN)             | 9003399465512                                                                                                                                                                                                                                                    |
| country of origin      | AT                                                                                                                                                                                                                                                               |
| customs number         | 85366990                                                                                                                                                                                                                                                         |
| net weight             | 0.093 kg                                                                                                                                                                                                                                                         |
| packaging quantity     | 20                                                                                                                                                                                                                                                               |
| minimum order quantity | 20                                                                                                                                                                                                                                                               |

|                                       |                  |
|---------------------------------------|------------------|
| ETIM 10.0                             | EC001327         |
| Model                                 | Earthing pin     |
| Material                              | Rubber           |
| Material quality                      | Thermoplastic    |
| Degree of protection (IP)             | IP54             |
| Insert direction                      | Straight         |
| Connection system                     | Screwed terminal |
| Colour                                | Black            |
| Number of poles                       | 3                |
| Nominal voltage                       | 250 V            |
| Nominal current                       | 16 A             |
| For heavy conditions according to VDE | True             |

|                     |                       |
|---------------------|-----------------------|
| K (cable Ø)         | 6-13 mm               |
| wire flexible       | 1-2,5 mm <sup>2</sup> |
| contact screws      | 80 Ncm                |
| housing screws      | 110 Ncm               |
| strain relief       | 110 Ncm               |
| dismantling length  | 30 mm                 |
| stripping length    | 7 mm                  |
| ambient temperature | -25 – 40 °C           |
| IK-code *)          | IK09                  |



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

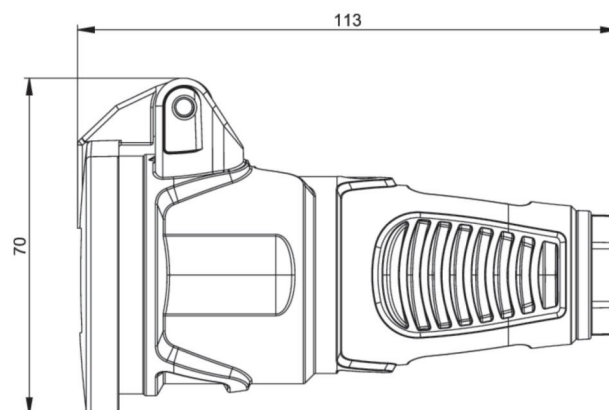

<https://www.pcelectric.at/shop/en/?func=detail&artnr=2412-srw>