


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>4355-6</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| article description    | <b>CEE-flanged socket sloping (100x112) 63A 5p 6h IP67 Pilot POWER TWIST</b>                                                                                                                                                                                                                                                                                                                                                                                            |
| description long       | CEE-flanged socket sloping (100x112) 63A 5p 6h IP67 Pilot POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 100x112 mm / 80x88 mm<br>with pilot contact sleeve<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399200922                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| net weight             | 0.658 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

|                                 |                      |
|---------------------------------|----------------------|
| ETIM 9.0                        | EC001317             |
| IEC-amperage                    | 63 A                 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles                 | 5                    |
| Clock hour position             | 6 h                  |
| Identification colour           | Red                  |
| Degree of protection (IP)       | IP67                 |
| Connection system               | Screwed terminal     |
| Angle of plug                   | Angled               |
| Material                        | Plastic              |
| Contact material                | CuZn                 |
| Surface treatment contacts      | Untreated            |
| Flange size vertical            | 112 mm               |
| Drill hole distance vertical    | 88 mm                |
| Flange size horizontal          | 100 mm               |
| Drill hole distance horizontal  | 80 mm                |

|                        |                                 |
|------------------------|---------------------------------|
| a                      | 100 mm                          |
| b                      | 112 mm                          |
| c                      | 80 mm                           |
| d                      | 88 mm                           |
| e                      | 64 mm                           |
| f                      | 80 mm                           |
| g                      | 92 mm                           |
| h                      | 82 mm                           |
| i                      | 7 mm                            |
| j                      | 148 mm                          |
| k                      | 154 mm                          |
| wire flexible          | 6-16 / 1-2,5 (Pilotkontakt) mm² |
| wire solid             | 6-25 / 1-4 (Pilotkontakt) mm²   |
| contact screws         | 200 / 100 (Pilotkontakt) Ncm    |
| dismantling length     | 100 mm                          |
| stripping length       | 15-18 mm                        |
| ambient temperature    | -25 – 40 °C                     |
| temperature resistance | -25 – 80 °C                     |
| IK-code *)             | IK10                            |

\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

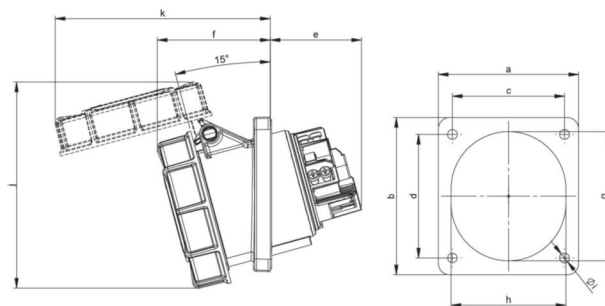

<https://www.pcelectric.at/shop/en/?func=detail&artnr=4355-6>