


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>76152-9</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| article description    | <b>CEE-switched interlocked socket DIN 16A 5p 9h IP66/IP67</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| description long       | CEE-switched interlocked socket DIN 16A 5p 9h IP66/IP67<br>housing material: PC/ABS<br>rated current: 16A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 9h<br>rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>wall mounting, mechanical interlock, hinged window (5 modules), DIN-rail<br>switch: ON/OFF PCE-Merz ML0; EN 60947-3; AC22A, 10kA<br>cable entry: top, bottom or rear (incl. threaded blind cap)<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399852909                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| net weight             | 1.548 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| packaging quantity     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| minimum order quantity | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

|                                  |                           |
|----------------------------------|---------------------------|
| ETIM 9.0                         | EC001324                  |
| IEC-amperage                     | 16 A                      |
| Number of poles                  | 5                         |
| Voltage according to EN 60309-2  | 200-250 V (50+60 Hz) blue |
| Clock hour position              | 9 h                       |
| Identification colour            | Blue                      |
| Degree of protection (IP)        | IP67                      |
| Switch                           | Mechanical locking        |
| Empty locations on mounting rail | True                      |
| Material housing                 | Plastic                   |
| Model                            | Base unit and cover       |
| Protection                       | None                      |
| Contact material                 | CuZn                      |
| Surface treatment contacts       | Nickel-plated             |

|                        |                         |
|------------------------|-------------------------|
| a                      | 363 mm                  |
| b                      | 153 mm                  |
| wire flexible          | 1,5-2,5 mm <sup>2</sup> |
| wire solid             | 1,5-4 mm <sup>2</sup>   |
| contact screws         | 120 Ncm                 |
| housing screws         | 110 Ncm                 |
| ambient temperature    | -25 – 40 °C             |
| temperature resistance | -25 – 80 °C             |
| IK-code *)             | IK09                    |



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

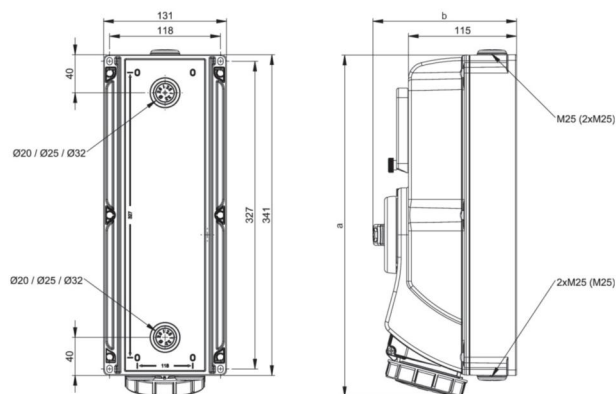

<https://www.pcelectric.at/shop/en/?func=detail&artnr=76152-9>