


|                        |                                                                                                                                                                                                                                                                                    |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>0922-10v</b>                                                                                                                                                                                                                                                                    |
| article description    | <b>CEE-plug 32A 2p 24/42VDC IP67 TWIST</b>                                                                                                                                                                                                                                         |
| description long       | CEE-plug 32A 2p 24/42VDC IP67 TWIST<br>housing material: PA6<br>rated current: 32A<br>number of poles: 2 (2P)<br>clock-position: 10h<br>rated voltage/frequency: 24/42V DC<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP67 |
| GTIN (EAN)             | 9003399150340                                                                                                                                                                                                                                                                      |
| country of origin      | AT                                                                                                                                                                                                                                                                                 |
| customs number         | 85366990                                                                                                                                                                                                                                                                           |
| net weight             | 0.163 kg                                                                                                                                                                                                                                                                           |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                 |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                 |

|                                 |                  |
|---------------------------------|------------------|
| ETIM 10.0                       | EC000140         |
| IEC-amperage                    | 32 A             |
| Number of poles                 | 2                |
| Voltage according to EN 60309-2 | <50 V DC grey    |
| Clock hour position             | 10 h             |
| Identification colour           | White            |
| Degree of protection (IP)       | IP67             |
| Connection system               | Screwed terminal |
| Cable entry                     | Gland nut        |
| Suitable for cable diameter     | 9.5 – 24 mm      |
| Angle of plug                   | Straight         |
| Material                        | Plastic          |
| Contact material                | CuZn             |
| Surface treatment contacts      | Nickel-plated    |

|                        |                      |
|------------------------|----------------------|
| a                      | 135 mm               |
| b                      | 71 mm                |
| K (cable Ø)            | 9,5-24 mm            |
| SW                     | 48 mm                |
| wire flexible          | 1-10 mm <sup>2</sup> |
| contact screws         | 160 Ncm              |
| strain relief          | 600 Ncm              |
| dismantling length     | 70 mm                |
| stripping length       | 14-16 mm             |
| ambient temperature    | -25 – 40 °C          |
| temperature resistance | -25 – 80 °C          |

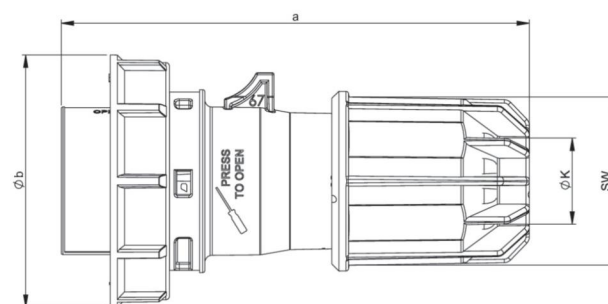

<https://www.pcelectric.at/shop/en/?func=detail&artnr=0922-10v>