



|                        |                                                                                                                                                                                                                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>105-0bw</b>                                                                                                                                                                                                                                                                                                        |
| article description    | <b>Socket outlet with protective contact 50x50 nat bulge IP54 rear (blue)</b>                                                                                                                                                                                                                                         |
| description long       | Socket outlet with protective earth contact series S-NOVA<br>housing material: PA6, color: blue<br>flange size: 50x50 mm<br>connection technology: screw terminal, rear entry<br>system: Austrian/German earthing system with sealing bulge<br>contacts: nickel plated<br>250V / 16A / 2P+E , protection rating: IP54 |
| GTIN (EAN)             | 9003399848926                                                                                                                                                                                                                                                                                                         |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                    |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                              |
| net weight             | 0.048 kg                                                                                                                                                                                                                                                                                                              |
| packaging quantity     | 100                                                                                                                                                                                                                                                                                                                   |
| minimum order quantity | 100                                                                                                                                                                                                                                                                                                                   |

|                                       |                                |
|---------------------------------------|--------------------------------|
| ETIM 9.0                              | EC001325                       |
| Model                                 | Socket outlet CEE 7/3 (type F) |
| Material                              | Plastic                        |
| Material quality                      | Thermoplastic                  |
| Halogen free                          | True                           |
| Flange size                           | 50x50 mm                       |
| With hinged lid                       | True                           |
| For heavy conditions according to VDE | True                           |
| Degree of protection (IP)             | IP54                           |
| Insert direction                      | Straight                       |
| Connection system                     | Screwed terminal               |
| Colour                                | Blue                           |
| RAL-number                            | 5017                           |
| Number of poles                       | 3                              |
| Nominal current                       | 16 A                           |
| Nominal voltage                       | 250 V                          |

|                     |                           |
|---------------------|---------------------------|
| a                   | 50 mm                     |
| b                   | 38 mm                     |
| c                   | 62 mm                     |
| d                   | 25 mm                     |
| e                   | 21 mm                     |
| f                   | 26 mm                     |
| g                   | 43 mm                     |
| h                   | 4,5 mm                    |
| wire flexible       | 1,5-2x2,5 mm <sup>2</sup> |
| wire solid          | 1,5-2x2,5 mm <sup>2</sup> |
| contact screws      | 80 Ncm                    |
| stripping length    | 8-10 mm                   |
| ambient temperature | -25 – 40 °C               |
| IK-code *)          | IK10                      |



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

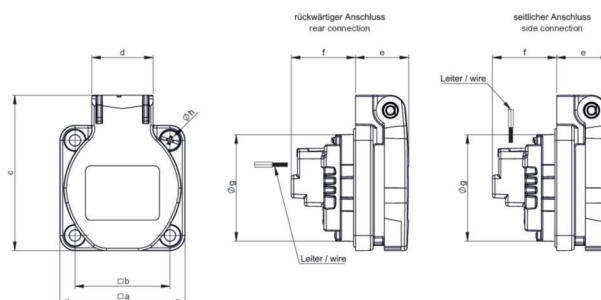

<https://www.pcelectric.at/shop/en/?func=detail&artnr=105-0bw>