


article#	243711-srcw
article description	3-way connector Taurus2 rubber cap with band fb SH DW IP54 red
description long	3-way connector Taurus2 rubber with cap color housing/terminal-cover: black/red contact carrier: polyamide ready wired on 3-pole terminal block (PH1) earthing system: French/Belgian with shutter (type E - with earth pin) and sealing bulge contacts: nickel plated 250V~ / 16A / 2P+E internal strain relief with cable clamp and bend protection sleeve for serve conditions protection rating: IP54
GTIN (EAN)	9003399619502
country of origin	AT
customs number	85366990
net weight	0.360 kg
packaging quantity	5
minimum order quantity	5

ETIM 10.0	EC001327
Model	Earthing pin
Material	Rubber
Material quality	Thermoplastic
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
Suitable for protective contact pin	True
Colour	Red
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A
For heavy conditions according to VDE	True

K (cable Ø)	6-13 mm
wire flexible	1-2,5 mm ²
contact screws	50 Ncm
housing screws	160 Ncm
strain relief	80 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C

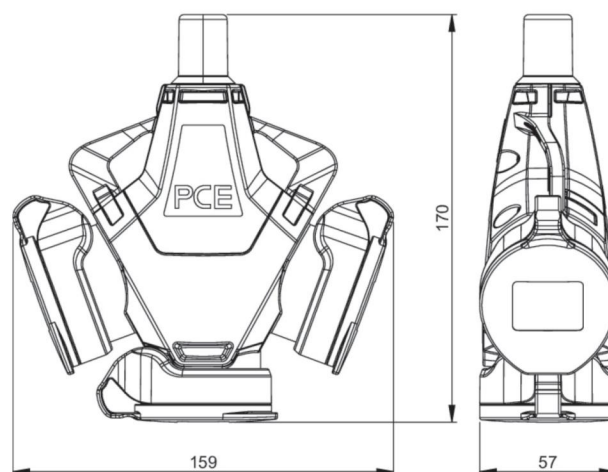

<https://www.pcelectric.at/shop/en/?func=detail&artnr=243711-srcw>