UPS ARMAC

RACK OFFICE ON-LINE PF1 10000VA DUST-FREE







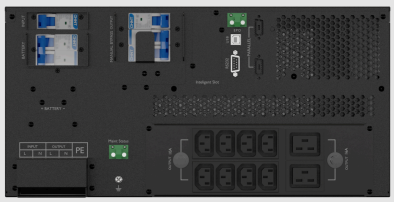

SPECYFIKACJA PRODUKTU:

UPS topology	On-line (VFI)
Power	10 000 W
Apparent power	10 000 VA
PowerFactor	1
Device efficiency	95 %
Type of casing	Rack, Tower
Number of outlets	10
Outlet type	IEC C13, IEC C19
Battery quantity	20
Expansion slot	Yes
Number of expansion slots	1
Connectors	RS-232, USB Type-B
Battery pack connector	Yes
Battery capacity	9 Ah
Battery type	Lead acid VRLA AGM
Battery voltage	12 V
Battery string voltage	240 V
Input voltage	230 V
Input voltage range	from 110 up to 300 V
Input frequency range	from 50 up to 60 Hz
Output voltage	230 V
Output acceptable voltage range	from 208 up to 240 V
Output frequency	50 Hz
Automatic Voltage Regulation (AVR)	Yes
Max transfer time	0 ms

EAN-13: 5901969430028
NR KAT.: R/10000I/PF1/DF

Waveform type	Full sine wave
AC/DC Transfer time	from 0 up to 0 ms
Functions	Emergency Power Off (EPO)
Audible alarms	Yes
Protections	Interference filter, Overload protection, Short circuit protection, Surge protection
Noise level	50 dB
Software	PowerManager II
Environment temperature	from 0 up to 40 °C
Environment humidity	from 0 up to 95 %
Weatherproof rating	IP20
Size	19",
ICT height	5 U
Dimensions	651 x 440 x 217 mm
Weight	74 kg

EAN-13: 5901969430028
NR KAT.: R/10000I/PF1/DF