UPS ARMAC

RACK OFFICE ON-LINE PF1 6000VA DUST-FREE







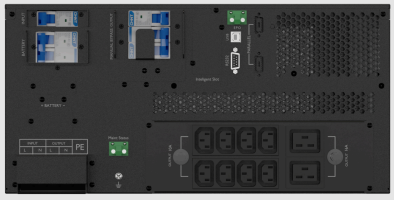

SPECYFIKACJA PRODUKTU:

UPS topology	On-line (VFI)
Power	6 000 W
Apparent power	6 000 VA
PowerFactor	1
Device efficiency	95 %
Type of casing	Rack, Tower
Number of outlets	10
Outlet type	IEC C13, IEC C19
Battery quantity	20
Expansion slot	Yes
Number of expansion slots	1
Connectors	RS-232, USB Type-B
Battery pack connector	Yes
Battery capacity	9 Ah
Battery type	Lead acid VRLA AGM
Battery voltage	12 V
Battery string voltage	240 V
Battery runtime at 50% load	20 min
Input voltage	230 V
Input voltage range	from 110 up to 300 V
Input frequency range	from 50 up to 60 Hz
Output voltage	230 V
Output acceptable voltage range	from 208 up to 240 V
Output frequency	50 Hz
Automatic Voltage Regulation (AVR)	Yes

EAN-13: 5901969430011
NR KAT.: R/6000I/PF1/DF

Max transfer time	0 ms
Waveform type	Full sine wave
AC/DC Transfer time	from 0 up to 0 ms
Functions	Emergency Power Off (EPO)
Audible alarms	Yes
Cold start	Yes
Protections	Interference filter, Overload protection, Short circuit protection, Surge protection
Noise level	50 dB
Software	PowerManager II
Environment temperature	from 0 up to 40 °C
Environment humidity	from 0 up to 95 %
Weatherproof rating	IP20
Size	19",
ICT height	5 U
Dimensions	651 x 440 x 217 mm
Weight	70 kg

EAN-13: 5901969430011
NR KAT.: R/6000I/PF1/DF