# MUNDIAL

## INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WANDER PLUG 3P+E 380V 32A 6H

Reference:
**03605**

## Characteristics:

| | |
|---|---|
| **Product type:** | Low voltage wander plug |
| **Current:** | 32A |
| **Poles:** | 3P+E |
| **Voltage:** | 380…415V |
| **Frecuency(Hz):** | 50/60Hz |
| **Time code:** | 6h |
| **Colour:** | Red |
| **Weight (kg):** | 0,238 |
| **Dimensions:** | |
| **Materials:** | Halogen-free plastic materials. Plastic parts: polyamide 6. Contacts: copper-zinc alloy |
| **Packaging units:** | 5 |

## Technical data:

| | |
|---|---|
| **Degree of protection:** | IP66-IP67 |
| **Degree of protection remarks:** | |
| **Resistance to impact:** | IK08 |
| **Glow wire resistance:** | 960 ºC |
| **Ball pressure test:** | 125 ºC |
| **Ambient temperature range:** | -25 ºC / +40 ºC |

## Certifications and norms:

| | |
|---|---|
| **Directive:** | 2014/35/EU |
| **Standards:** | IEC 60309-1-2 |
| **Certificates:** | CE |

## Codes:


| | |
|---|---|
| **EAN:** | 8431044036052 |
| **Customs tariff number:** | 85.36.69.90 |
| **ETIM 8.0:** | EC000140 |

# MUNDIAL

## INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WANDER PLUG 3P+E 380V 32A 6H

**Reference:** 03605

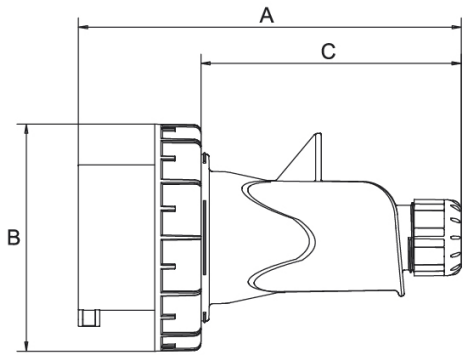




**Detailed drawing:**

https://www.ide.es/docs/planos/pdf/03605.pdf

https://www.ide.es/docs/planos/dxf/03605.dxf

https://www.ide.es/docs/planos/stp/03605.stp

## Dimensions:

| I | Poles | Dimensions | | |
|---|---|---|---|---|
| | | A | B | C |
| 16A | 2P+T | 134 | 69 | 96 |
| | 3P+T | 144 | 77 | 106 |
| | 3P+N+T | 149 | 89 | 111 |
| 32A | 2P+T | 156 | 89 | 111 |
| | 3P+T | 156 | 89 | 111 |
| | 3P+N+T | 163 | 98 | 118 |
| 63A | 2P+T | 257 | 114 | - |
| | 3P+T | 257 | 114 | - |
| | 3P+N+T | 257 | 114 | - |
| 125A | 2P+T | 270 | 131 | - |
| | 3P+T | 270 | 131 | - |
| | 3P+N+T | 270 | 131 | - |

## Sustainability:

RoHS - REACH

## Product end of life stage:

Product concerned in the WEEE regulations.

## Supply:

Supplied in a single box per packaging multiple