MUNDIAL

INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WANDER PLUG 3P+N+E 380V 32A 6H

Reference:
03606

Characteristics:

Product type:	Low voltage wander plug
Current:	32A
Poles:	3P+N+E
Voltage:	380…415V
Frecuency(Hz):	50/60Hz
Time code:	6h
Colour:	Red
Weight (kg):	0,269
Dimensions:	
Materials:	Halogen-free plastic materials. Plastic parts: polyamide 6. Contacts: copper-zinc alloy
Packaging units:	5

Technical data:

Degree of protection:	IP66-IP67
Degree of protection remarks:	
Resistance to impact:	IK08
Glow wire resistance:	960 ºC
Ball pressure test:	125 ºC
Ambient temperature range:	-25 ºC / +40 ºC

Certifications and norms:

Directive:	2014/35/EU
Standards:	IEC 60309-1-2
Certificates:	CE

Codes:


EAN:	8431044036069
Customs tariff number:	85.36.69.90
ETIM 8.0:	EC000140


MUNDIAL

INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WANDER PLUG 3P+N+E 380V 32A 6H

Reference: 03606

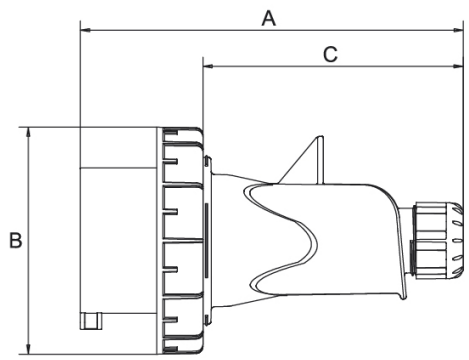

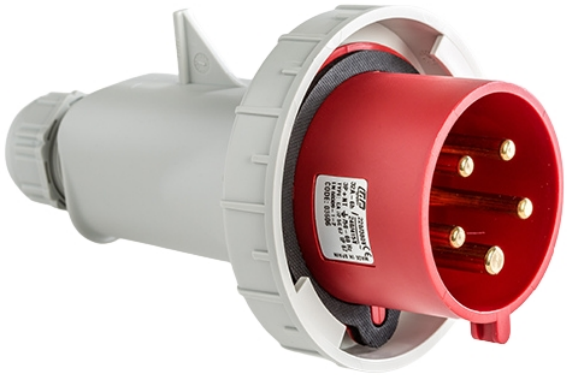

Detailed drawing:

https://www.ide.es/docs/planos/pdf/03606.pdf

https://www.ide.es/docs/planos/dxf/03606.dxf

https://www.ide.es/docs/planos/stp/03606.stp

Dimensions:

I	Poles	Dimensions		
		A	B	C
16A	2P+T	134	69	96
	3P+T	144	77	106
	3P+N+T	149	89	111
32A	2P+T	156	89	111
	3P+T	156	89	111
	3P+N+T	163	98	118
63A	2P+T	257	114	-
	3P+T	257	114	-
	3P+N+T	257	114	-
125A	2P+T	270	131	-
	3P+T	270	131	-
	3P+N+T	270	131	-

Sustainability:

RoHS - REACH

Product end of life stage:

Product concerned in the WEEE regulations.

Supply:

Supplied in a single box per packaging multiple