# MUNDIAL

## INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WALL SOCKET 3P+N+E 380V 32A 6H

Reference:
**03826**

## Characteristics:

| | |
|---|---|
| **Product type:** | Low voltage wall socket |
| **Current:** | 32A |
| **Poles:** | 3P+N+E |
| **Voltage:** | 380…415V |
| **Frecuency(Hz):** | 50/60Hz |
| **Time code:** | 6h |
| **Colour:** | Red |
| **Weight (kg):** | 0,403 |
| **Dimensions:** | 112x101x139 |
| **Materials:** | Halogen-free plastic materials. Plastic parts: polyamide 6. Contacts: copper-zinc alloy |
| **Packaging units:** | 6 |

## Technical data:

| | |
|---|---|
| **Degree of protection:** | IP66-IP67 |
| **Degree of protection remarks:** | |
| **Resistance to impact:** | IK08 |
| **Glow wire resistance:** | 960 ºC |
| **Ball pressure test:** | 125 ºC |
| **Ambient temperature range:** | -25 ºC / +40 ºC |

## Certifications and norms:

| | |
|---|---|
| **Directive:** | 2014/35/EU |
| **Standards:** | IEC 60309-1-2 |
| **Certificates:** | CE |

## Codes:


| | |
|---|---|
| **EAN:** | 8431044038261 |
| **Customs tariff number:** | 85.36.69.90 |
| **ETIM 8.0:** | EC001321 |

# MUNDIAL

## INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WALL SOCKET 3P+N+E 380V 32A 6H

**Reference:** 03826

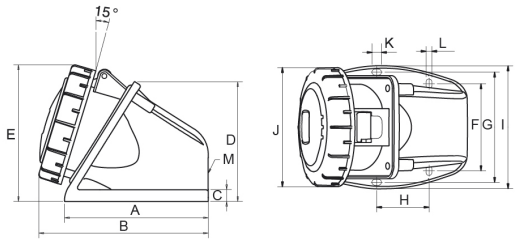




**Detailed drawing:**

https://www.ide.es/docs/planos/pdf/03826.pdf

https://www.ide.es/docs/planos/dxf/03826.dxf

https://www.ide.es/docs/planos/stp/03826.stp

## Dimensions:

| I | Poles | Dimensions | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | F | G | H | I | J | K | L | M |
| 16 A | 2P+E | 100 | 117 | 10 | 88 | 90 | 53.6 | 76.6 | 40 | 87 | 69 | 8 | 5 | M25x1.5 |
| | 3P+E | 100 | 117 | 10 | 88 | 95 | 53.6 | 76.6 | 40 | 87 | 77 | 8 | 5 | M25x1.5 |
| | 3P+N+E | 118 | 135 | 10 | 99 | 108 | 71.6 | 76.6 | 43 | 101 | 89 | 8 | 5 | M25x1.5 |
| 32A | 2P+E | 118 | 140 | 10 | 99 | 108 | 71.6 | 90.6 | 43 | 101 | 89 | 8 | 5 | M25x1.5 |
| | 3P+E | 118 | 140 | 10 | 99 | 108 | 71.6 | 90.6 | 43 | 101 | 89 | 8 | 5 | M25x1.5 |
| | 3P+N+E | 118 | 140 | 10 | 99 | 111 | 71.6 | 90.6 | 43 | 101 | 98 | 8 | 5 | M25x1.5 |
| 63 A | 2P+E | 170 | 213 | - | - | 173 | 104 | - | 136 | 118 | - | - | 6 | M40+2xM32 |
| | 3P+E | 170 | 213 | - | - | 173 | 104 | - | 136 | 118 | - | - | 6 | M40+2xM32 |
| | 3P+N+E | 170 | 213 | - | - | 173 | 104 | - | 136 | 118 | - | - | 6 | M40+2xM32 |
| 125A | 2P+E | 262 | 322 | - | - | 205 | 140 | - | 240 | 162 | - | - | 8 | M63+2xM40 |
| | 3P+E | 262 | 322 | - | - | 205 | 140 | - | 240 | 162 | - | - | 8 | M63+2xM40 |
| | 3P+N+E | 262 | 322 | - | - | 205 | 140 | - | 240 | 162 | - | - | 8 | M63+2xM40 |

## Sustainability:

RoHS - REACH

## Product end of life stage:

Product concerned in the WEEE regulations.

## Supply:

Supplied in a single box per packaging multiple