ARGENTA PLUS SERIES

IP65-IP55 STEEL FLOOR-STANDING COMPACT CABINETS (BIG)

Description: IP65 COMPACT FLOOR-STANDING CABINET (BIG) 1650x600x400 OPAQUE DOOR - STAINLESS STEEL

Reference:
BIG1656040PO/INX

Characteristics:

Product type:	Stainless steel floor-standing compact cabinet (BIG)
Dimensions cabinet:	(AxBxC) 1650x600x400 mm
Installation:	Surface
Type of door:	Single opaque door
Locking:	4-point 1/4 turn lock, double bit insert with retractable handle
Finish:	Scotch 320 satin finish
Colour:	-
Mounting plate:	With flat mounting plate. 3-mm galvanised sheet steel
Weight (kg):	87,78
Materials:	AISI 304L stainless steel
Thickness:	Enclosure and rear panel: 1,5 mm. Door: 2 mm. Cable entry lid: 2 mm.
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	
Capacity:	
Max. cabinet load:	
Max. mounting plate load:	
Max. door load:	

Technical data:

Degree of protection:	IP65
NEMA degree of protection:	NEMA 1, 4, 4x, 12
Resistance to impact:	IK10
Ambient temperature range:	-25 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	UL508A

Codes:


EAN:	8431044216461
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000261

ARGENTA PLUS SERIES

IP65-IP55 STEEL FLOOR-STANDING COMPACT CABINETS (BIG)

Description: IP65 COMPACT FLOOR-STANDING CABINET (BIG) 1650x600x400 OPAQUE DOOR - STAINLESS STEEL

Reference: BIG1656040PO/INX

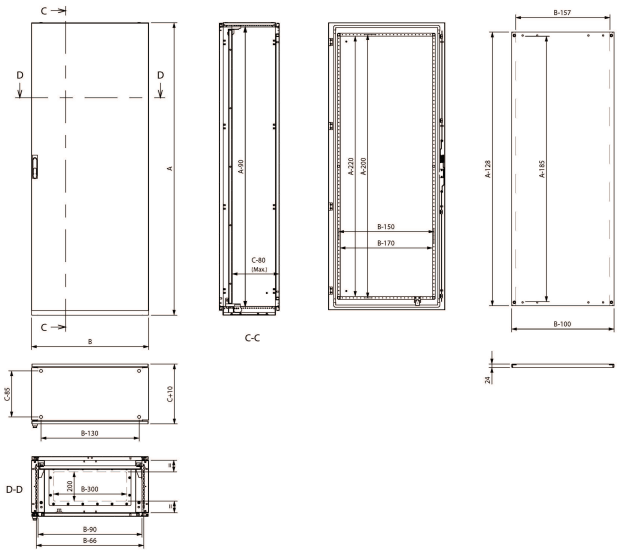



Standard drawing

Detailed drawing: https://www.ide.es/downloads/planos/pdf/BIG1656040POINX.pdf

https://www.ide.es/downloads/planos/dxf/BIG1656040POINX.dxf

https://www.ide.es/downloads/planos/stp/BIG1656040POINX.stp

Cable entry:	(WidthxDepth) 200x300 mm	**Body to be flush-fitted:**	-
Wall fixing:	-	**Wall fixing material:**	
Inside usable space:	(HeightxWidthxDepth) 1560x510x320 mm	**Glass door with transparent panel:**	-
No. Hinges:		**Door profiles:**	

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied on a pallet, protected with front and rear cardboard sheets, corner protectors and film. The plate is supplied assembled. Cable-gland lid included.

Recommended applications:

Industrial environments and outdoor facilities with aggresive agents or saline environments. Food, chemical and petrochemical industries, where a high degree of hygiene is required.