DOMOS

IP33 MECHANISM AND JUNCTION BOXES

Description: IP33 FLUSH-FIT JUNCTION BOX CONVENTIONAL WALLS

Reference:
CT3252

Characteristics:

Product type:	IP33 Flush-mounted junction box with cover for conventional walls
Exterior dimensions (Height x Width x Depth):	321x521x66 mm
Dimensions of the flush-fit gap (HxWxD):	320x520x62 mm
Number of modules:	-
Installation:	Flush-fitted
Color:	RAL 9003
Window:	White
Weight (kg):	1,32
Cable entry:	-
Components:	Base and cover
Materials:	Halogen-free plastic materials. Self-extinguishing. Base: Shock-proof PS
Lid-window-door material:	Shock-proof PS

Technical data:

Degree of protection:	IP33
Resistance to impact:	IK07
Glow wire resistance:	650 ºC
Ball pressure test:	70 ºC
Ambient temperature range:	-5 ºC / +40 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	UNE-EN 60670-1-22
Certificates:	

CE

Codes:


EAN:	8431044273006
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC002601

DOMOS

IP33 MECHANISM AND JUNCTION BOXES

Description: IP33 FLUSH-FIT JUNCTION BOX CONVENTIONAL WALLS

Reference: CT3252

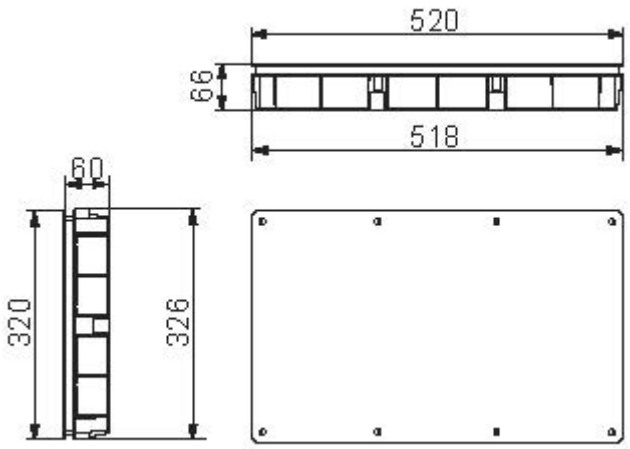



Detailed drawing:

- https://www.ide.es/downloads/planos/pdf/CT3252.pdf
- https://www.ide.es/downloads/planos/dxf/CT3252.dxf
- https://www.ide.es/downloads/planos/stp/CT3252.stp

Exterior dimensions (Height x Width x Depth):

321x521x66 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

320x520x62 mm

Sustainability:

RoHS - REACH

Supply:

The boxes are supplied individually, shrink-wrapped and in multiple cardboard packaging, according to minimum packaging units.

Packaging units: 7

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Tertiary and residential sectors. For use indoors, designed for installation in BRICK WALLS. Flats, houses, offices, hotels, etc.