DOMOS-K

IP33 MECHANISM AND JUNCTION BOXES

Description: IP33 FLUSH-FIT JUNCTION BOX HOLLOW WALLS

Reference:
CT3252/PH

Characteristics:

Product type:	IP33 FLUSH-FIT JUNCTION BOX HOLLOW WALLS
Exterior dimensions (Height x Width x Depth):	321x521 mm
Dimensions of the flush-fit gap (HxWxD):	305x500x70 mm
Number of modules:	
Installation:	Flush-fitted hollow walls
Color:	RAL 9003
Window:	White
Weight (kg):	1,326
Cable entry:	-
Components:	Base and cover
Materials:	Halogen-free plastic materials. Self-extinguishing. Base: Shock-proof PS
Lid-window-door material:	Shock-proof PS

Technical data:

Degree of protection:	IP33
Resistance to impact:	IK07
Glow wire resistance:	850 ºC
Ball pressure test:	70 ºC
Ambient temperature range:	-5 ºC / +40 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	UNE-EN 60670-1-22
Certificates:	

CE

Codes:


EAN:	8431044165257
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC002601

DOMOS-K

IP33 MECHANISM AND JUNCTION BOXES

Description: IP33 FLUSH-FIT JUNCTION BOX HOLLOW WALLS

Reference: CT3252/PH

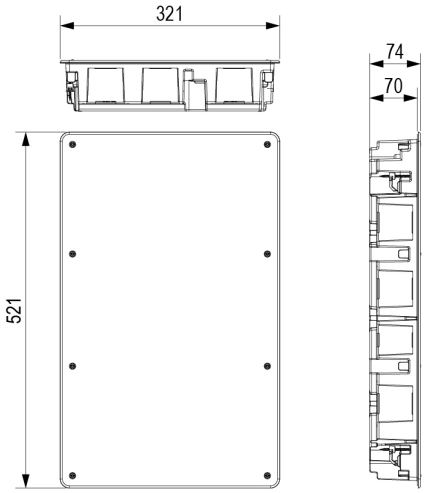



Detailed drawing:

https://www.ide.es/downloads/planos/pdf/CT3252PH.pdf

https://www.ide.es/downloads/planos/dxf/CT3252PH.dxf

https://www.ide.es/downloads/planos/stp/CT3252PH.stp

Exterior dimensions (Height x Width x Depth):

321x521 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

305x500x70 mm

Sustainability:

RoHS - REACH

Supply:

The boxes are supplied individually, shrink-wrapped and in multiple cardboard packaging, according to minimum packaging units.

Packaging units: 6

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Tertiary and residential sectors. For use indoors, designed for installation in BRICK WALLS. Flats, houses, offices, hotels, etc.