# TECNO SERIES

## IP66 STEEL TERMINAL BOXES

Description: IP66 ROLLED STEEL TERMINAL BOX 300x300x135 PLAIN SIDES

Reference:
**ELA3030135**

## Characteristics:

| | |
|---|---|
| **Product type:** | Steel terminal box with plain sides |
| **Dimensions cabinet:** | (AxBxC) 300x300x135 mm |
| **Installation:** | Surface |
| **Type of door:** | Opaque lid |
| **Locking:** | Lid fastened with fast jackscrew with watertight caps |
| **Finish:** | Coated with hardened polyester paint, textured, with UV protection |
| **Colour:** | RAL 7035 |
| **Mounting plate:** | Without mounting plate. 2 side brackets |
| **Weight (kg):** | 4,2 |
| **Materials:** | Cold-rolled steel EN 10130+A1 |
| **Thickness:** | 1,2 mm |
| **Sealing gasket:** | Injected polyurethane sealing gasket |
| **Door material:** | |
| **Capacity:** | |
| **Max. cabinet load:** | |
| **Max. mounting plate load:** | |
| **Max. door load:** | |

## Technical data:

| | |
|---|---|
| **Degree of protection:** | IP66 |
| **NEMA degree of protection:** | NEMA 1, 4, 12 |
| **Resistance to impact:** | IK10 |
| **Ambient temperature range:** | -25 ºC / +60 ºC |
| **Maximum material temperature:** | |
| **Maximum operating voltage:** | 1000 V AC / 1500 V DC |

## Certificates and standards:

| | |
|---|---|
| **Directive:** | 2014/35/EU |
| **Standards:** | IEC 62208 |
| **Certificates:** | UL508A |

## Codes:


| | |
|---|---|
| **EAN:** | 8431044016764 |
| **Customs tariff number:** | 85.38.10.00 |
| **ETIM 8.0:** | EC002713 |

# TECNO SERIES

## IP66 STEEL TERMINAL BOXES

Description: IP66 ROLLED STEEL TERMINAL BOX 300x300x135 PLAIN SIDES

**Reference:** ELA3030135

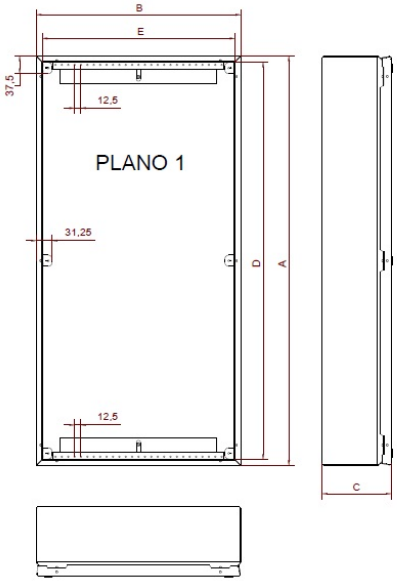




Standard drawing

**Detailed drawing:** https://www.ide.es/downloads/planos/pdf/ELA3030135.pdf

https://www.ide.es/downloads/planos/dxf/ELA3030135.dxf

| | | | |
|---|---|---|---|
| **Cable entry:** | - | **Body to be flush-fitted:** | - |
| **Wall fixing:** | (HeightxWidth) 260x260 mm | **Wall fixing material:** | |
| **Inside usable space:** | (DxE) 266x118 mm | **Glass door with transparent panel:** | - |
| **No. Hinges:** | - | **Door profiles:** | - |

## Sustainability:

RoHS - REACH

## Product end of life:

It does not require specific recycling operations.

## Supply:

The body, cover and accessory bag are supplied shrink-wrapped.

## Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.