TECNO INOX SERIES

IP66 STAINLESS STEEL TERMINAL BOXES

Description: IP66 304L INOX STEEL TERMINAL BOXES 400x200x135 HINGED LID

Reference:
ELAB4020135/INX

Characteristics:

Product type:	AISI 304L Stainless steel terminal box with hinged lid
Dimensions cabinet:	(AxBxC) 400x200x135 mm
Installation:	Surface
Type of door:	Opaque hinged lid
Locking:	Lid closure using stainless steel bolts and Teflon seal
Finish:	Scotch 320 satin finish
Colour:	-
Mounting plate:	Without mounting plate
Weight (kg):	
Materials:	AISI 304L Stainless steel
Thickness:	1,2 mm (0.05")
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	
Capacity:	
Max. cabinet load:	
Max. mounting plate load:	
Max. door load:	

Technical data:

Degree of protection:	IP66
NEMA degree of protection:	NEMA 1, 4, 4x, 12
Resistance to impact:	IK10
Ambient temperature range:	-25 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208
Certificates:	

CE

Codes:


EAN:	8431044263397
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC002713

TECNO INOX SERIES

IP66 STAINLESS STEEL TERMINAL BOXES

Description: IP66 304L INOX STEEL TERMINAL BOXES 400x200x135 HINGED LID

Reference: ELAB4020135/INX

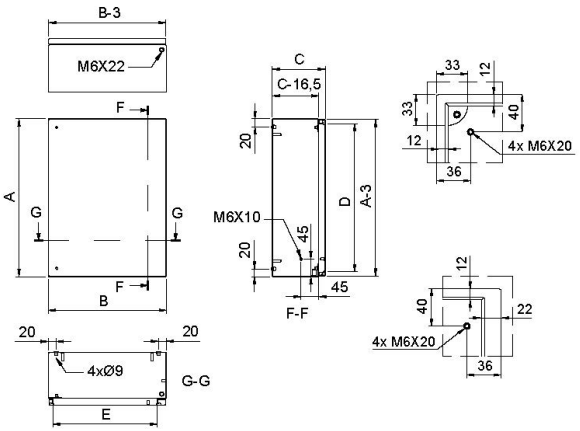

Standard drawing



Cable entry:	-	**Body to be flush-fitted:**	-
Wall fixing:	(HeightxWidth) 360x160 mm	**Wall fixing material:**	
Inside usable space:	(DxE) 375x165 mm	**Glass door with transparent panel:**	-
No. Hinges:	2	**Door profiles:**	-

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in individual cardboard packaging, containing body, cover and accessory bag.

Recommended applications:

Industrial environments and outdoor facilities with aggressive agents or saline environments, food, chemical and petrochemical industries, where a high degree of hygiene is required. Sea ports and areas with a high salt or chlorine concentration.