# ARGENTA PLUS SERIES

## IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 1800x800x400 OPAQUE DOOR WITHOUT PLATE

Reference:
**ENL1808040PO/SP**

## Characteristics:

| | |
|---|---|
| **Product type:** | Steel floor-standing combinable cabinets (ENL) |
| **Dimensions cabinet:** | (AxBxC) 1800x800x400 mm |
| **Installation:** | Surface |
| **Type of door:** | Single opaque door |
| **Locking:** | Lever handle with 4 anchoring points, 5 mm double-bit insert, colors RAL 5013 Cobalt Blue and RAL 7016 Anthracite Grey |
| **Finish:** | Coated with primer, and hardened polyester paint, textured, with UV protection |
| **Colour:** | RAL 7035 |
| **Mounting plate:** | Without mounting plate |
| **Weight (kg):** | 89,2 |
| **Materials:** | Cold-rolled steel EN 10130+A1 |
| **Thickness:** | Enclosure: 1,5 mm. Door: 2 mm. Cable entry lid: 1,2 mm. |
| **Sealing gasket:** | Injected polyurethane sealing gasket |
| **Door material:** | |
| **Capacity:** | |
| **Max. cabinet load:** | |
| **Max. mounting plate load:** | |
| **Max. door load:** | |

## Technical data:

| | |
|---|---|
| **Degree of protection:** | IP55 |
| **NEMA degree of protection:** | NEMA 1, 12 |
| **Resistance to impact:** | IK10 |
| **Ambient temperature range:** | -25 ºC / +60 ºC |
| **Maximum material temperature:** | |
| **Maximum operating voltage:** | 1000 V AC / 1500 V DC |

## Certificates and standards:

| | |
|---|---|
| **Directive:** | 2014/35/EU |
| **Standards:** | IEC 62208, IEC 61439-1 |
| **Certificates:** | UL508A |

## Codes:


| | |
|---|---|
| **EAN:** | 8431044117317 |
| **Customs tariff number:** | 85.38.10.00 |
| **ETIM 8.0:** | EC000261 |

# ARGENTA PLUS SERIES

## IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 1800x800x400 OPAQUE DOOR WITHOUT PLATE

**Reference:** ENL1808040PO/SP

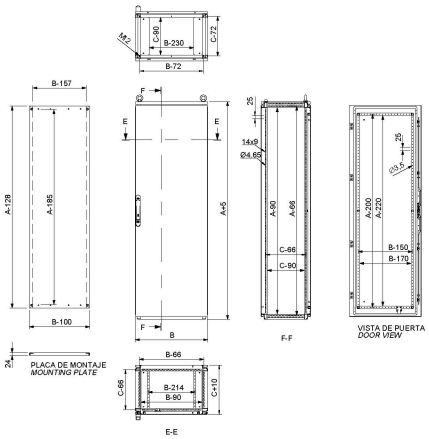




Standard drawing

**Detailed drawing:** https://www.ide.es/downloads/planos/pdf/ENL1808040POSP.pdf

https://www.ide.es/downloads/planos/dxf/ENL1808040POSP.dxf

https://www.ide.es/downloads/planos/stp/ENL1808040POSP.stp

| | | | |
|---|---|---|---|
| **Cable entry:** | (Width x Depth) 570x310 mm | **Body to be flush-fitted:** | |
| **Wall fixing:** | | **Wall fixing material:** | |
| **Inside usable space:** | (HeightxWidthxDepth) 1710x710x310 mm | **Glass door with transparent panel:** | - |
| **No. Hinges:** | | **Door profiles:** | |

## Sustainability:

RoHS - REACH

## Product end of life:

It does not require specific recycling operations.

## Supply:

Supplied on a pallet, protected with front and rear cardboard sheets, corner protectors and film. It includes 2 lifting eyebolts fitted and cable entry lids. Supplied without mounting plate or side panels.

## Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.