ARGENTA PLUS SERIES

IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 2000x800x600 OPAQUE DOOR WITHOUT PLATE

Reference:
ENL2008060PO/SP

Characteristics:

Product type:	Steel floor-standing combinable cabinets (ENL)
Dimensions cabinet:	(AxBxC) 2000x800x600 mm
Installation:	Surface
Type of door:	Single opaque door
Locking:	Lever handle with 4 anchoring points, 5 mm double-bit insert, colors RAL 5013 Cobalt Blue and RAL 7016 Anthracite Grey
Finish:	Coated with primer, and hardened polyester paint, textured, with UV protection
Colour:	RAL 7035
Mounting plate:	Without mounting plate
Weight (kg):	102,8
Materials:	Cold-rolled steel EN 10130+A1
Thickness:	Enclosure: 1,5 mm. Door: 2 mm. Cable entry lid: 1,2 mm.
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	Cold rolled steel, 2-mm thick, primed and painted RAL 7035 Light Grey.
Capacity:	
Max. cabinet load:	900 kg
Max. mounting plate load:	500 kg
Max. door load:	50 kg

Technical data:

Degree of protection:	IP55
NEMA degree of protection:	NEMA 1, 12
Resistance to impact:	IK10
Ambient temperature range:	-25 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	UL508A

Codes:


EAN:	8431044117461
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000261

ARGENTA PLUS SERIES

IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 2000x800x600 OPAQUE DOOR WITHOUT PLATE

Reference: ENL2008060PO/SP

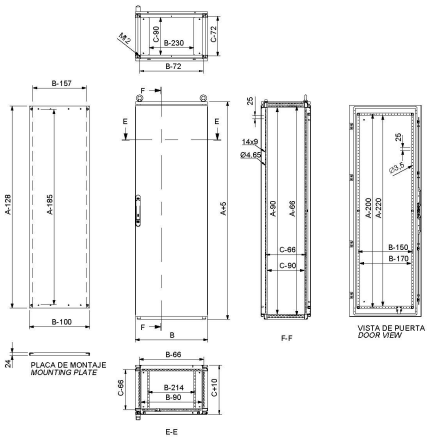



Standard drawing

Detailed drawing: https://www.ide.es/downloads/planos/pdf/ENL2008060POSP.pdf

https://www.ide.es/downloads/planos/dxf/ENL2008060POSP.dxf

https://www.ide.es/downloads/planos/stp/ENL2008060POSP.stp

Cable entry:	(Width x Depth) 570x510 mm	**Body to be flush-fitted:**	-
Wall fixing:	-	**Wall fixing material:**	
Inside usable space:	(HeightxWidthxDepth) 1910x710x510 mm	**Glass door with transparent panel:**	-
No. Hinges:	4	**Door profiles:**	

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied on a pallet, protected with front and rear cardboard sheets, corner protectors and film. It includes 2 lifting eyebolts fitted and cable entry lids. Supplied without mounting plate or side panels.

Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.