TECNO SERIES

IP66 STEEL TERMINAL BOXES

Description: IP66 ROLLED STEEL TERMINAL BOX 600x400x135 CABLE ENTRY

Reference:
EXA6040135

Characteristics:

Product type:	Steel terminal box with cable entry
Dimensions cabinet:	(AxBxC) 600x400x135 mm
Installation:	Surface
Type of door:	Opaque lid
Locking:	Lid fastened with fast jackscrew with watertight caps
Finish:	Coated with hardened polyester paint, textured, with UV protection
Colour:	RAL 7035
Mounting plate:	Without mounting plate. 2 side brackets, 1 central bracket
Weight (kg):	10,6
Materials:	Cold-rolled steel EN 10130+A1
Thickness:	1,2 mm
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	
Capacity:	
Max. cabinet load:	
Max. mounting plate load:	
Max. door load:	

Technical data:

Degree of protection:	IP66
NEMA degree of protection:	NEMA 1, 4, 12
Resistance to impact:	IK10
Ambient temperature range:	-25 ºC / +40 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208
Certificates:	UL508A

Codes:


EAN:	8431044016931
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC002713

TECNO SERIES

IP66 STEEL TERMINAL BOXES

Description: IP66 ROLLED STEEL TERMINAL BOX 600x400x135 CABLE ENTRY

Reference: EXA6040135

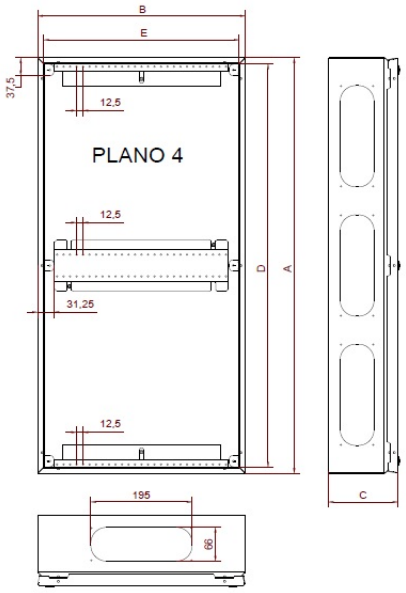

Standard drawing



Detailed drawing: https://www.ide.es/downloads/planos/pdf/EXA6040135.pdf

https://www.ide.es/downloads/planos/dxf/EXA6040135.dxf

Cable entry:	80x200 mm	**Body to be flush-fitted:**	-
Wall fixing:	(HeightxWidth) 560x360 mm	**Wall fixing material:**	
Inside usable space:	(DxE) 575x375 mm	**Glass door with transparent panel:**	-
No. Hinges:	-	**Door profiles:**	-

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

The body, cover and accessory bag are supplied shrink-wrapped.

Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.