GOLD MULTIMEDIA

IP40 Multimedia boxes with metal door. Flush-fit

Description: IP40 Multimedia enclosures: Type 3

Reference:
GMEM56PO56/RR

Characteristics:

Product type:	Enclosure with multimedia plate 425x295 + 56 modules. With neutral and earth bars
Exterior dimensions (Height x Width x Depth):	752x775x99 mm
Dimensions of the flush-fit gap (HxWxD):	717x742x89 mm
Number of modules:	4x14 (56) DIN rail
Installation:	Flush-fit in brick walls
Color:	white RAL 9003
Window:	Metal door with double ventilation slots
Weight (kg):	10,9
Cable entry:	Back: 4x[4xM25-2xM32-2xM40]. Left and right: 12xø50 - 2x(80x54)
Components:	
Materials:	External frame and door made from cold-rolled steel sheet. Front frame cover in white PS. Flush-mounted bases in Brick walls 650 ºC PS. Galvanised steel micro-perforated plate. Halogen-free plastic materials.
Lid-window-door material:	

Technical data:

Degree of protection:	IP40
Resistance to impact:	IK08
Glow wire resistance:	Flush-mounted bases in Brick walls 650 ºC
Ball pressure test:	
Ambient temperature range:	-25 ºC / +40 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	EN-IEC 60670-1-24 e IEC-EN 622008
Certificates:	CE

Codes:

EAN:	8431044257327
Customs tariff number:	85.38.10.00


ETIM 8.0:	EC000214

GOLD MULTIMEDIA

IP40 Multimedia boxes with metal door. Flush-fit

Description: IP40 Multimedia enclosures: Type 3

Reference: GMEM56PO56/RR

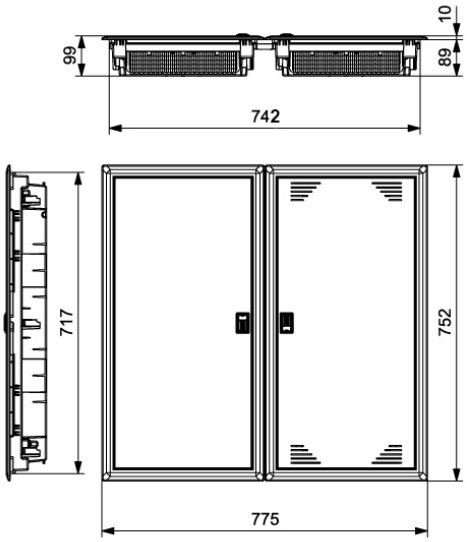



Detailed drawing:

- https://www.ide.es/downloads/planos/pdf/GMEM56PO56RR.pdf
- https://www.ide.es/downloads/planos/dxf/GMEM56PO56RR.dxf
- https://www.ide.es/downloads/planos/stp/GMEM56PO56RR.stp

Exterior dimensions (Height x Width x Depth):

752x775x99 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

717x742x89 mm

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film. They are supplied with all the elements assembled except the elements supplied in the accessory bag.

Packaging units: 2

Recommended applications:

Tertiary and residential sectors. For use indoors, designed for flush-fit installation. Flats, houses, offices, hotels, etc.