# GOLD MULTIMEDIA

**IP40 Multimedia boxes with metal door. Flush-fit**

Description: IP40 Multimedia enclosures: Type 2

Reference:
**GMEM70PO28/RR**

## Characteristics:

| | |
|---|---|
| **Product type:** | Enclosure with multimedia plate 550x295 + 28 modules. With neutral and earth bars |
| **Exterior dimensions (Height x Width x Depth):** | 877x387x99 mm |
| **Dimensions of the flush-fit gap (HxWxD):** | 842x352x89 mm |
| **Number of modules:** | 2x14 (28) DIN rail |
| **Installation:** | Flush-fit in brick walls |
| **Color:** | white RAL 9003 |
| **Window:** | Metal door with double ventilation slots |
| **Weight (kg):** | 6,6 |
| **Cable entry:** | Back: 2x[2xM25-1xM32-1xM40]. Left and right: 8xø50 - 1x(80x54) |
| **Components:** | |
| **Materials:** | External frame and door made from cold-rolled steel sheet. Front frame cover in white PS. Flush-mounted bases in Brick walls 650 ºC PS. Galvanised steel micro-perforated plate. Halogen-free plastic materials. |
| **Lid-window-door material:** | |

## Technical data:

| | |
|---|---|
| **Degree of protection:** | IP40 |
| **Resistance to impact:** | IK08 |
| **Glow wire resistance:** | Flush-mounted bases in Brick walls 650 ºC |
| **Ball pressure test:** | |
| **Ambient temperature range:** | -25 ºC / +40 ºC |
| **Maximum material temperature:** | |
| **Maximum operating voltage:** | 1000 V AC / 1500 V DC |
| **Rated current:** | |
| **Double insulation:** | Class II |

## Certificates and standards:

| | |
|---|---|
| **Directive:** | 2014/35/EU |
| **Standards:** | EN-IEC 60670-1-24 e IEC-EN 622008 |
| **Certificates:** | CE |

## Codes:

| | |
|---|---|
| **EAN:** | 8431044115689 |
| **Customs tariff number:** | 85.38.10.00 |


| | |
|---|---|
| **ETIM 8.0:** | EC000214 |

# GOLD MULTIMEDIA

**IP40 Multimedia boxes with metal door. Flush-fit**

Description: IP40 Multimedia enclosures: Type 2

**Reference:** GMEM70PO28/RR

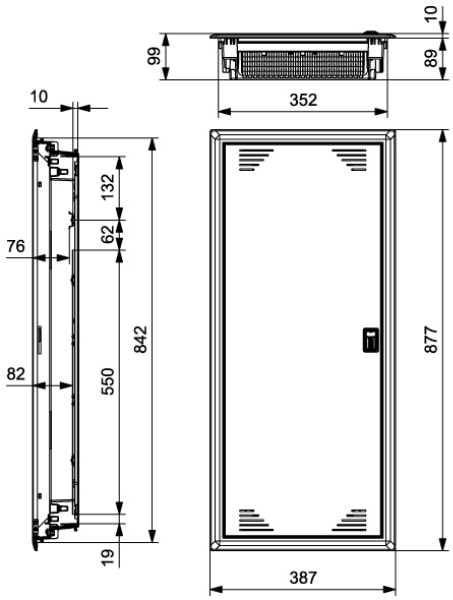




**Detailed drawing:**

- https://www.ide.es/downloads/planos/pdf/GMEM70PO28RR.pdf
- https://www.ide.es/downloads/planos/dxf/GMEM70PO28RR.dxf
- https://www.ide.es/downloads/planos/stp/GMEM70PO28RR.stp

**Exterior dimensions (Height x Width x Depth):**

877x387x99 mm

**Dimensions of the flush-fit gap (Height x Width x Depth):**

842x352x89 mm

## Sustainability:

RoHS - REACH

## Product end of life:

It does not require specific recycling operations.

## Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film. They are supplied with all the elements assembled except the elements supplied in the accessory bag.

**Packaging units:** 2

## Recommended applications:

Tertiary and residential sectors. For use indoors, designed for flush-fit installation. Flats, houses, offices, hotels, etc.