GOLD FLUSH-FIT

IP40 FLUSH-FIT DISTRIBUTION BOXES

Description: IP40 FLUSH-FIT BOX 3x12 (36) MOD. PE+N

Reference:
GPE36PT3F/RR

Characteristics:

Product type:	IP40 Flush-fit distribution box 36 modules, transparent door and screwed neutral and earth bar
Exterior dimensions (Height x Width x Depth):	574x316x97 mm
Dimensions of the flush-fit gap (HxWxD):	546x288x74 mm
Number of modules:	3x12 (36) DIN rail
Installation:	Flush-fitted brick walls
Color:	RAL 9003
Window:	Transparent
Weight (kg):	2,69
Cable entry:	Bottom: 1xM50/M40 4xM25/M20 5xM25/M16 - Rear: 2xM40/M32 4xM25 - Left: 4xØ32 - Right: 4xØ32
Components:	Cable section: 12x(2,5-6 mm2)+12x(4-10 mm2)+1x(10-25 mm2)+1x(16-35 mm2)
Materials:	Halogen-free plastic materials. Base: PS. Frame: ABS
Lid-window-door material:	Tinted PC

Technical data:

Degree of protection:	IP40
Resistance to impact:	IK08
Glow wire resistance:	650 ºC
Ball pressure test:	70 ºC
Ambient temperature range:	-25 ºC / +40 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	125A
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	

CE

Codes:

EAN:	8431044179773
Customs tariff number:	85.38.10.00


ETIM 8.0:	EC000214

GOLD FLUSH-FIT

IP40 FLUSH-FIT DISTRIBUTION BOXES

Description: IP40 FLUSH-FIT BOX 3x12 (36) MOD. PE+N

Reference: GPE36PT3F/RR

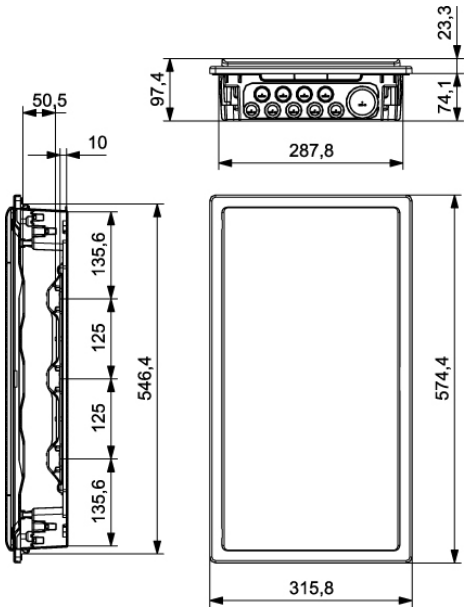



Detailed drawing:

- https://www.ide.es/downloads/planos/pdf/GPE36PT3FRR.pdf
- https://www.ide.es/downloads/planos/dxf/GPE36PT3FRR.dxf
- https://www.ide.es/downloads/planos/stp/GPE36PT3FRR.stp

Exterior dimensions (Height x Width x Depth):

574x316x97 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

546x288x74 mm

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 4

Recommended applications:

Tertiary and residential sectors. For use indoors, designed for flush-fit installation. Flats, houses, offices, hotels, etc.