GOLD SURFACE

IP40 SURFACE DISTRIBUTION BOXES

Description: IP40 SURFACE BOX 2x18 (36) MOD. PE+N

Reference:
GPS36PT2F/RR

Characteristics:

Product type:	IP40 Surface distribution box 36 modules, transparent door and screwed neutral andearth bar
Exterior dimensions (Height x Width x Depth):	419x393x118
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	2x18 (36) DIN rail
Installation:	Surface
Color:	
Window:	
Weight (kg):	2,8
Cable entry:	Bottom: 1xM50/M40 4xM25/M20 5xM25/M16 - Rear: 2xM40/M32 4xM25 - Left: 2xØ27 1x(60x32) - Right: 2xØ27 1x(60x32)
Components:	
Materials:	Halogen-free plastic materials. Base and frame: ABS
Lid-window-door material:	

Technical data:

Degree of protection:	IP40
Resistance to impact:	IK08
Glow wire resistance:	650 ºC
Ball pressure test:	70 ºC
Ambient temperature range:	-25 ºC / +40 ºC
Maximum material temperature:	
Maximum operating voltage:	1002 V AC / 1500 V DC
Rated current:	125A
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	UNE-EN 62208 and UNE-EN 60439-1 (as applicable)
Certificates:	

CE

Codes:

EAN:	8431044522425
Customs tariff number:	85.38.10.00


ETIM 8.0:	EC000214


GOLD SURFACE

IP40 SURFACE DISTRIBUTION BOXES

Description: IP40 SURFACE BOX 2x18 (36) MOD. PE+N

Reference: GPS36PT2F/RR

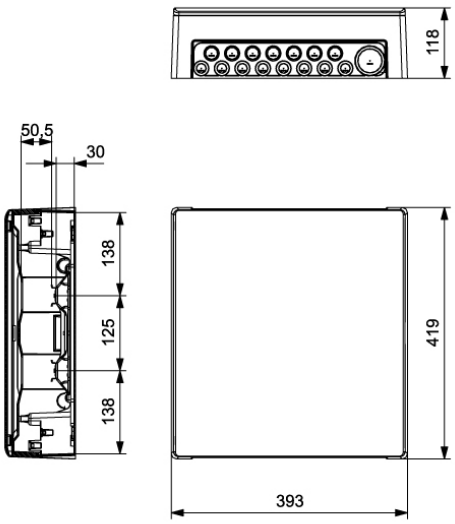

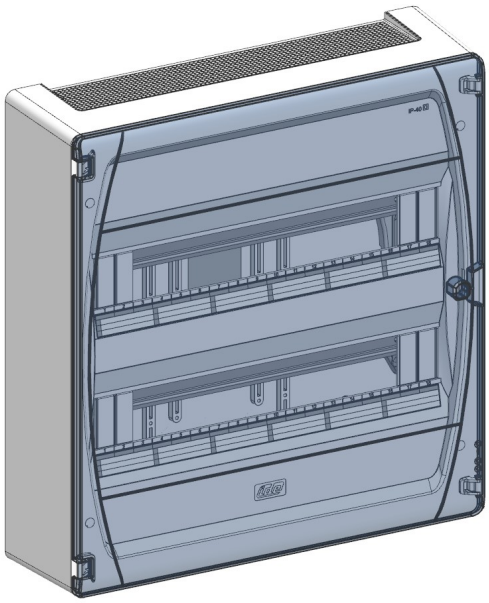

Detailed drawing:

- https://www.ide.es/downloads/planos/pdf/GPS36PT2FRR.pdf
- https://www.ide.es/downloads/planos/dxf/GPS36PT2FRR.dxf
- https://www.ide.es/downloads/planos/stp/GPS36PT2FRR.stp

Exterior dimensions (Height x Width x Depth):

419x393x118

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 2

Recommended applications:

Tertiary and residential sectors. For use indoors, designed for surface installation. Flats, houses, offices, hotels, etc.