GOLD SURFACE

IP40 SURFACE DISTRIBUTION BOXES

Description: IP40 SURFACE BOX 3x18 (54) MOD. PE+N

Reference:
GPS54PT/RR

Characteristics:

Product type:	IP40 Surface distribution box 54 modules, transparent door and screwed neutral andearth bar
Exterior dimensions (Height x Width x Depth):	544x393x118 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	3x18 (54) DIN rail
Installation:	Surface
Color:	Tinted PC
Window:	Transparent
Weight (kg):	3,2
Cable entry:	Bottom: 1xM50/M40 4xM25/M20 8xM25/M16 - Rear: 2xM40/M32 4xM25 - Left: 2xØ27 - Right: 2xØ27
Components:	-
Materials:	Halogen-free plastic materials. Base and frame: ABS
Lid-window-door material:	ABS

Technical data:

Degree of protection:	IP40
Resistance to impact:	IK08
Glow wire resistance:	650 ºC
Ball pressure test:	70 ºC
Ambient temperature range:	-25 ºC / +40 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	UNE-EN 62208, UNE-EN 61439-1
Certificates:	

CE

Codes:

EAN:	8431044522661
Customs tariff number:	85.38.10.00


ETIM 8.0:	EC000214


GOLD SURFACE

IP40 SURFACE DISTRIBUTION BOXES

Description: IP40 SURFACE BOX 3x18 (54) MOD. PE+N

Reference: GPS54PT/RR

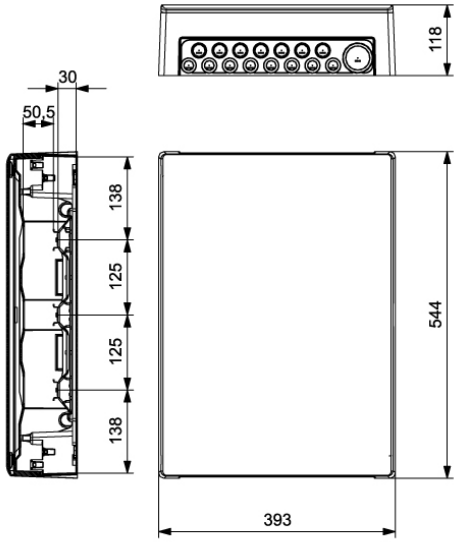

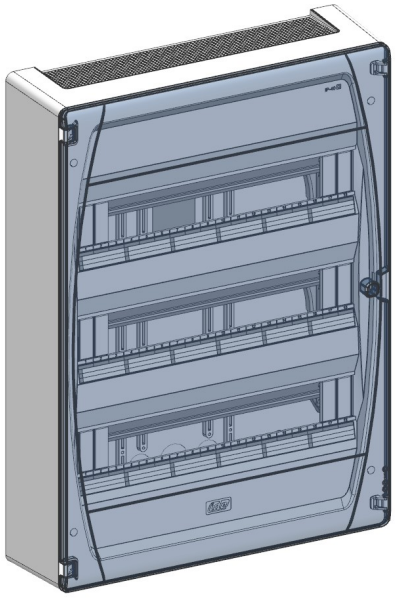

Detailed drawing:

- https://www.ide.es/downloads/planos/pdf/GPS54PTRR.pdf
- https://www.ide.es/downloads/planos/dxf/GPS54PTRR.dxf
- https://www.ide.es/downloads/planos/stp/GPS54PTRR.stp

Exterior dimensions (Height x Width x Depth):

544x393x118 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 2

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Tertiary and residential sectors. For use indoors, designed for surface installation. Flats, houses, offices, hotels, etc.