ARGENTA INOX SERIES

IP55 STAINLESS STEEL WALL-MOUNTING CABINETS

Description: IP55 304L-INOX WALL-MOUNTING CABINET 1200x1000x300 - DOUBLE DOOR

Reference:
INX12010030/PD

Characteristics:

Product type:	304L Stainless steel wall-mounting cabinet
Dimensions cabinet:	(AxBxC) 1200x1000x300 mm
Installation:	Surface
Type of door:	Double opaque door. Revrsible
Locking:	5-mm double-bit painted zamak lock - One 3-points lock
Finish:	Scotch 320 satin finish
Colour:	-
Mounting plate:	With flat mounting plate. 2-mm galvanised sheet steel
Weight (kg):	68,3
Materials:	AISI 304L stainless steel
Thickness:	Enclosure: 1.5 mm. Door: 1.5 mm.
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	
Capacity:	
Max. cabinet load:	390 kg
Max. mounting plate load:	350 kg
Max. door load:	40 kg

Technical data:

Degree of protection:	IP55
NEMA degree of protection:	NEMA 1, 12
Resistance to impact:	IK10
Ambient temperature range:	-25 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	UL508A

Codes:


EAN:	8431044088730
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000261

ARGENTA INOX SERIES

IP55 STAINLESS STEEL WALL-MOUNTING CABINETS

Description: IP55 304L-INOX WALL-MOUNTING CABINET 1200x1000x300 - DOUBLE DOOR

Reference: INX12010030/PD

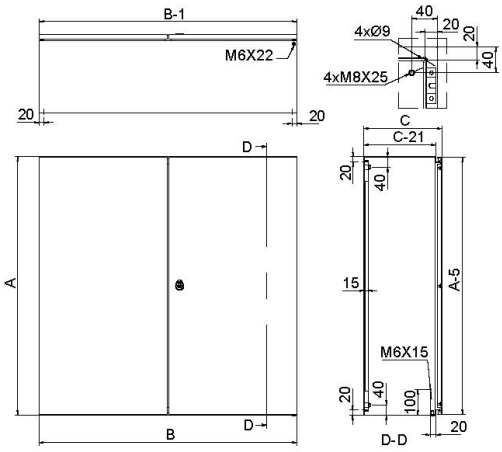



Standard drawing

Detailed drawing: https://www.ide.es/downloads/planos/pdf/INX12010030PD.pdf

https://www.ide.es/downloads/planos/dxf/INX12010030PD.dxf

https://www.ide.es/downloads/planos/stp/INX12010030PD.stp

Cable entry:	-	**Body to be flush-fitted:**	-
Wall fixing:	(HeightxWidth) 1160x960 mm	**Wall fixing material:**	
Inside usable space:	(HeightxWidthxDepth) 1150x950x279 mm	**Glass door with transparent panel:**	-
No. Hinges:	6	**Door profiles:**	4

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in individual packaging containing cabinet, plate and accessory bag. The cabinet is protected by a plastic bag. Mounting plate is supplied assembled inside the cabinet.

Recommended applications:

Industrial environments and outdoor facilities with aggressive agents or saline environments. food, chemical and petrochemical industries, where a high degree of hygiene is required.