STAR KNOCK-OUT

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 SURFACE BOX 1x9 MOD. KNOCKOUT COVERS. N&E BARS

Reference:
PCSN9PT/RR

Characteristics:

Product type:	IP65 Boxes for industrial sockets with knock-out covers and neutral and earth bars
Exterior dimensions (Height x Width x Depth):	436x210x137 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	1x9 DIN rail
Installation:	Surface
Color:	RAL 7035
Window:	Transparent
Weight (kg):	1,66
Cable entry:	Top: 4xM20 - 1xM40. Bottom: 4xM20 - 1xM40. Oblong rear: 2xOB25x25
Components:	4 Plain covers - 2 16A/Schuko IP67 cover - 2 IP44/IP54 Schuko cover. Cable section N&E: 5x(2,5-6 mm2)+3x(4-10 mm2)+1x(16-35 mm2)
Materials:	Halogen-free plastic materials. Frame and base: ABS. Recommended for outdoor use: UV protection under ISO standard 4892-2, Method A: 500h.
Lid-window-door material:	Tinted PC, UV protection

Technical data:

Degree of protection:	IP65
Resistance to impact:	IK08
Glow wire resistance:	650 ºC
Ball pressure test:	70 ºC
Ambient temperature range:	-25 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	125A
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	

CE

Codes:

EAN:	8431044243757
Customs tariff number:	85.38.10.00


ETIM 8.0: EC000379

STAR KNOCK-OUT

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 SURFACE BOX 1x9 MOD. KNOCKOUT COVERS. N&E BARS

Reference: PCSN9PT/RR

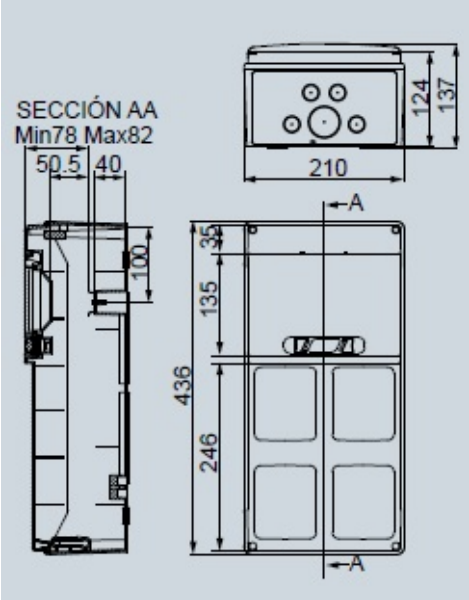



Detailed drawing:

https://www.ide.es/downloads/planos/pdf/PCSN9PTRR.pdf

https://www.ide.es/downloads/planos/dxf/PCSN9PTRR.dxf

https://www.ide.es/downloads/planos/stp/PCSN9PTRR.stp

Exterior dimensions (Height x Width x Depth):

436x210x137 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 5

Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.