GLASS SERIES

IP55 POLYESTER WALL-MOUNTING CABINETS

Description: IP55 POLYESTER WALL-MOUNTING CABINET 1250x1000x300 OPAQUE DOOR - W/HANDLE - OPEN AT THE BOTTOM

Reference:
POL12510030/A

Characteristics:

Product type:	Polyester wall-mounting cabinet open at the bottom
Dimensions cabinet:	(AxBxC) 1260x1000x312 mm
Installation:	Surface
Type of door:	Double door
Locking:	3-mm 3-point sealable double bit insert lock with retractable handle
Finish:	
Colour:	RAL 7035
Mounting plate:	
Weight (kg):	34,8
Materials:	Fibreglass-reinforced polyester
Thickness:	Side panel: 4 mm. Top and bottom: 3 mm. Door and rear: 3.5 mm.
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	Fibreglass-reinforced polyester
Capacity:	
Max. cabinet load:	
Max. mounting plate load:	259 kg
Max. door load:	19 kg

Technical data:

Degree of protection:	IP55
NEMA degree of protection:	
Resistance to impact:	IK10
Ambient temperature range:	-30 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	

CE

Codes:


EAN:	8431044244051
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000261

GLASS SERIES

IP55 POLYESTER WALL-MOUNTING CABINETS

Description: IP55 POLYESTER WALL-MOUNTING CABINET 1250x1000x300 OPAQUE DOOR - W/HANDLE - OPEN AT THE BOTTOM

Reference: POL12510030/A

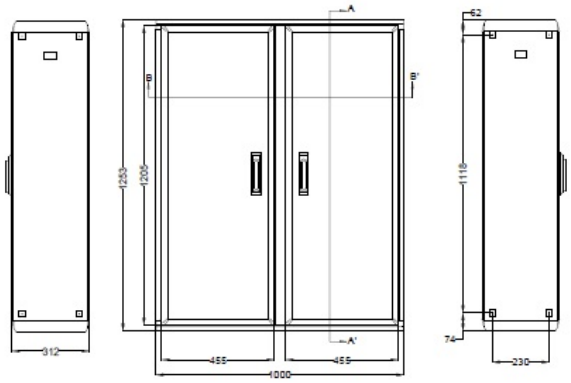



Standard drawing

Detailed drawing: https://www.ide.es/downloads/planos/pdf/POL12510030A.pdf

https://www.ide.es/downloads/planos/dxf/POL12510030A.dxf

https://www.ide.es/downloads/planos/stp/POL12510030A.stp

Cable entry:	-	**Body to be flush-fitted:**	-
Wall fixing:	(HeightxWidth) 1118x1052 mm	**Wall fixing material:**	
Inside usable space:	(HeightxWidthxDepth) 1162x905x274 mm	**Glass door with transparent panel:**	-
No. Hinges:	8	**Door profiles:**	

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied individually shrink-wrapped and protected with cardboard at top and bottom. The accessories for fitting the mounting plate are fitted on the cabinet. Plate supplied in individual packaging if requested as an accessory.

Recommended applications:

Industrial environments and outdoor facilities. food, chemical and pharmaceutical industries, transformer sub-stations and outdoor areas where durability and resistance against chemicals and UV rays are necessary. Suitable for use in marine environments.