GLASS SERIES

IP66 POLYESTER WALL-MOUNTING CABINETS

Description: IP66 POLYESTER WALL-MOUNTING CABINET 400x300x200 TRANSPARENT DOOR

Reference:
POL403020PT

Characteristics:

Product type:	Polyester wall-mounting cabinet
Dimensions cabinet:	(AxBxC) 400x300x200 mm
Installation:	Surface
Type of door:	Single transparent door
Locking:	3-mm double-bit lock (1P)
Finish:	
Colour:	RAL 7035
Mounting plate:	
Weight (kg):	3,7
Materials:	Fibreglass-reinforced polyester
Thickness:	Enclosure: 2.5 mm. Door: 2.7 mm.
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	UV stabilized polycarbonate
Capacity:	
Max. cabinet load:	24 kg
Max. mounting plate load:	19 kg
Max. door load:	

Technical data:

Degree of protection:	IP66
NEMA degree of protection:	
Resistance to impact:	IK08
Ambient temperature range:	-30 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	

CE

Codes:


EAN:	8431044062907
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000261

GLASS SERIES

IP66 POLYESTER WALL-MOUNTING CABINETS

Description: IP66 POLYESTER WALL-MOUNTING CABINET 400x300x200 TRANSPARENT DOOR

Reference: POL403020PT

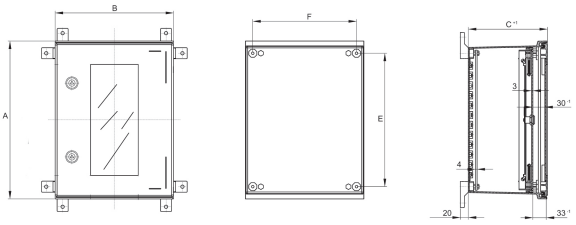



Standard drawing

Detailed drawing: https://www.ide.es/downloads/planos/pdf/POL403020PT.pdf

https://www.ide.es/downloads/planos/dxf/POL403020PT.dxf

https://www.ide.es/downloads/planos/stp/POL403020PT.stp

Cable entry:	-	**Body to be flush-fitted:**	-
Wall fixing:	(HeightxWidth) 338x262 mm	**Wall fixing material:**	
Inside usable space:	(Height x Width) 362x262 mm	**Glass door with transparent panel:**	(HeightxWidth) 281x121 mm
No. Hinges:	2	**Door profiles:**	

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in individual packaging. The accessories for fitting the mounting plate are fitted on the cabinet. Plate supplied in individual packaging if requested as an accessory.

Recommended applications:

Industrial environments and outdoor facilities. food, chemical and pharmaceutical industries, transformer sub-stations and outdoor areas where durability and resistance against chemicals and UV rays are necessary. Suitable for use in marine environments.