ROC SERIES

IP66 POLYESTER DOUBLE INSULATION BOXES

Description: IP66 POLYESTER BOX WITH POLYCARBONATE TRANSPARENT LID - MOD.: 4x4 high

Reference:
ROC44APT

Characteristics:

Product type:	Polyester double insulation box with transparent cover
Dimensions cabinet:	(AxBxC) 360x360x201 mm
Installation:	Surface
Type of door:	Transparent lid
Locking:	Screws for use with a screwdriver
Finish:	Double insulation: Class II
Colour:	RAL 7035
Mounting plate:	Without mounting plate
Weight (kg):	2,6
Materials:	Fibreglass-reinforced polyester
Thickness:	
Sealing gasket:	Polyurethan
Door material:	Polycarbonate
Capacity:	
Max. cabinet load:	
Max. mounting plate load:	
Max. door load:	

Technical data:

Degree of protection:	IP66
NEMA degree of protection:	
Resistance to impact:	IK09
Ambient temperature range:	-30 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	

CE

Codes:


EAN:	8431044123769
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC002600

ROC SERIES

IP66 POLYESTER DOUBLE INSULATION BOXES

Description: IP66 POLYESTER BOX WITH POLYCARBONATE TRANSPARENT LID - MOD.: 4x4 high

Reference: ROC44APT

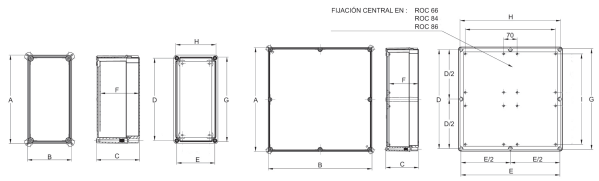



Standard drawing

Detailed drawing: https://www.ide.es/downloads/planos/pdf/ROC44APT.pdf

https://www.ide.es/downloads/planos/dxf/ROC44APT.dxf

https://www.ide.es/downloads/planos/stp/ROC44APT.stp

Cable entry:	-	**Body to be flush-fitted:**	-
Wall fixing:	(GxH) 335x335 mm	**Wall fixing material:**	
Inside usable space:	(DxExF) 340x340x184 mm	**Glass door with transparent panel:**	-
No. Hinges:		**Door profiles:**	

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in a single box per packaging multiples (2x). Each reference includes a bag with four standard manual closing screws and four screws for fixing to the base plate.

Recommended applications:

Industrial environments and outdoor facilities. food, chemical and pharmaceutical industries, transformer sub-stations and outdoor areas where durability and resistance against chemicals and UV rays are necessary. Suitable for use in marine environments.