

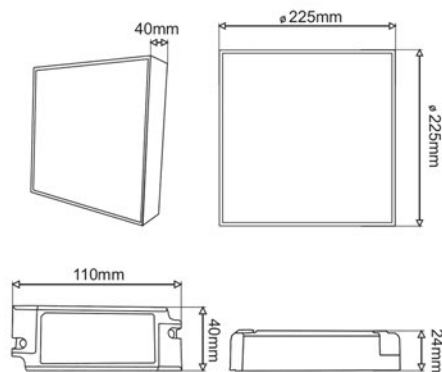
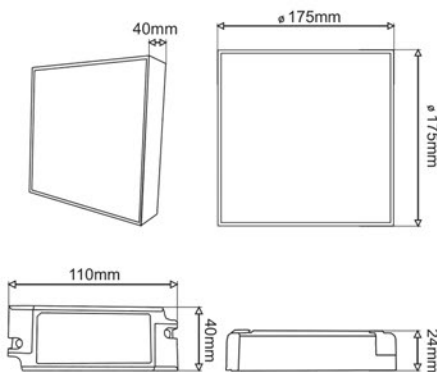


DOWNLIGHT NATYNKOWE OKRĄGLE
Square Surface Mount Downlights

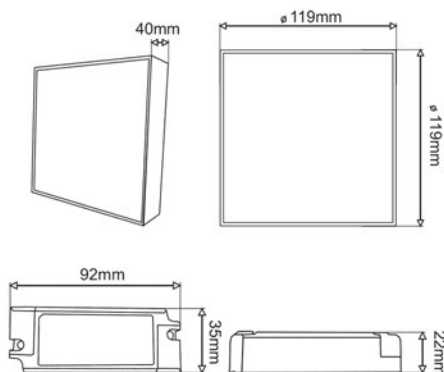

Folder	Barcode	lm	W	V	A	PF	CRI	IP	Beam	Color	Height	Size	Beam Spread	Temp
PF028429	5908293928429	1440	16W	85-265V AC	300mA	>0,9	> 80	20	120°	4000K	2835	∅119x119x40	95%<1s	30000 ≥35000 -10/+40
PF028436	5908293928436	2160	24W	85-265V AC	300mA	>0,9	> 80	20	120°	4000K	2835	∅175x175x40	95%<1s	30000 ≥35000 -10/+40
PF028443	5908293928443	2850	30W	85-265V AC	300mA	>0,9	> 80	20	120°	4000K	2835	∅225x225x40	95%<1s	30000 ≥35000 -10/+40
PF029686	5908293929686	1440	16W	85-265V AC	300mA	>0,9	> 80	20	120°	3000K	2835	∅119x119x40	95%<1s	30000 ≥35000 -10/+40
PF029693	5908293929693	2160	24W	85-265V AC	300mA	>0,9	> 80	20	120°	3000K	2835	∅175x175x40	95%<1s	30000 ≥35000 -10/+40
PF029709	5908293929709	2850	30W	85-265V AC	300mA	>0,9	> 80	20	120°	3000K	2835	∅225x225x40	95%<1s	30000 ≥35000 -10/+40

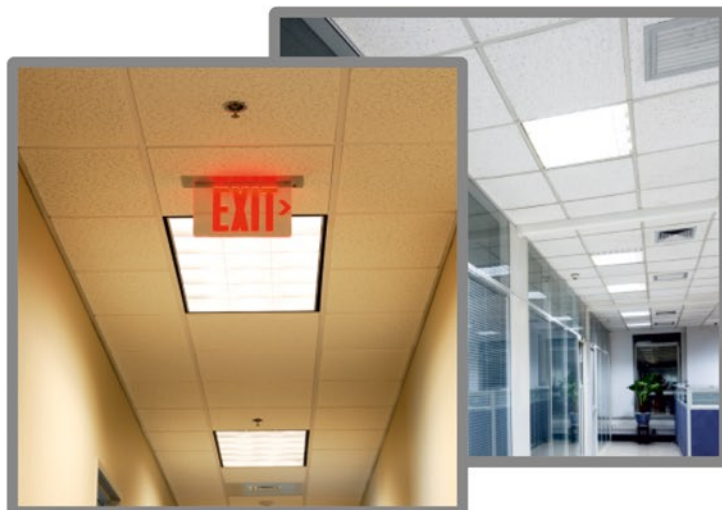