
Product Environmental Profile

SEDNA - 1POLE SWITCH - 10AX WITHOUT FRAME WHITE






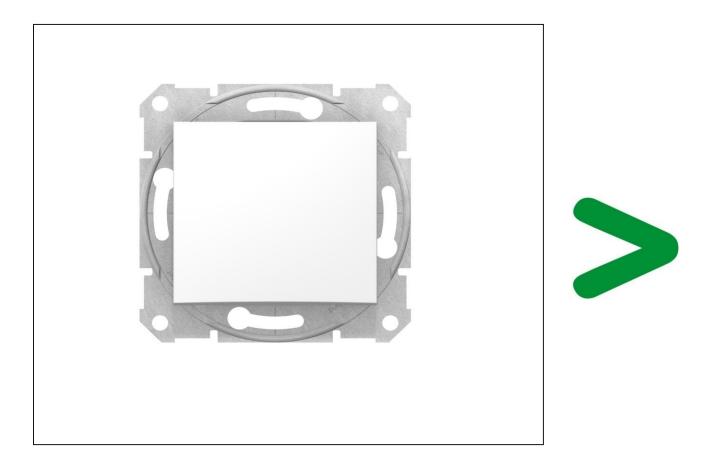

لے General information						
Representative product	SEDNA - 1POLE SWITCH - 10AX WITHOUT FRAME WHITE -SDN0100121					
Description of the product	The main purpose of the SEDNA switch rated at 10AX 250V AC product is to give a solution for the control of Electricity and Energy consumption.					
	Establish, support and interrupt for 20 years rated currents in normal conditions of circuit characterized by the current 16A, for the operating voltage 250V.					

Constituent materials

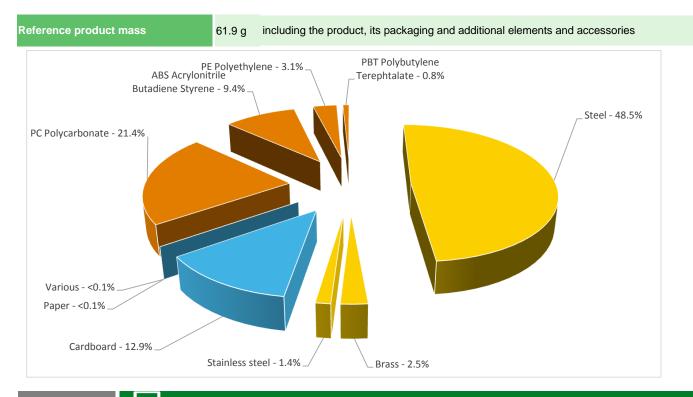

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-pr


Additional environmental information


The SEDNA - 1POLE SWITCH - 10AX WITHOUT FRAME WHITE presents the following relevent environmental aspects

Manufacturing Manufactured at a Schneider Electric production site ISO14001 certified						
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 10.1 g, con	nsisting of	f cardboard (80.49%), PE film (19.39%), Paper (0.10%)			
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).					
Use	The product does not require special maintenance operations.					
	End of life optimized to decrease	ount of waste and allow recovery of the product components and materials				
End of life	No special end-of-life treatment treatment process.	t required	. According to countries' practices this product can enter the usual end-of-life			
	Recyclability potential: 69	9%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).			

Reference life time	20 years					
Product category	Passive products - non-continuous operation					
Installation elements	No special components needed					
Use scenario Product dissipation is 0.08 W, loading rate is 50% and service uptime percentage is 30%						
Geographical representativeness	Russia and Turkey					
Technological The main purpose of the SEDNA switch rated at 10AX 250V AC product is to give a solution Electricity and Energy consumption.						
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: ELDA,Poland	Electricity mix; AC; consumption mix, at consumer; 220V; RU	Electricity mix; AC; consumption mix, at consumer; 220V; RU	Electricity mix; AC; consumption mix, at consumer; 220V; RU		

Compulsory indicators		SEDNA - 1P	OLE SWITCH - 10	AX WITHOUT	FRAME WHITE	E - SDN0100	121
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1,37E-05	1,37E-05	0*	0*	2,79E-08	0*
Contribution to the soil and water acidification	kg SO ₂ eq	3,01E-03	1,04E-03	3,65E-05	0*	1,92E-03	1,87E-05
Contribution to water eutrophication	kg PO₄ ³⁻ eq	1,39E-03	8,64E-04	8,41E-06	2,09E-06	5,06E-04	4,86E-06
Contribution to global warming	kg CO₂ eq	3,06E+00	3,24E-01	8,00E-03	1,32E-03	2,72E+00	8,22E-03
Contribution to ozone layer depletion	kg CFC11 eq	8,94E-08	1,75E-08	1,62E-11	0*	7,15E-08	4,08E-10
Contribution to photochemical oxidation	kg C_2H_4 eq	6,32E-04	1,05E-04	2,61E-06	1,45E-07	5,23E-04	1,98E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1,08E-02	7,94E-03	0*	0*	2,82E-03	8,02E-06
Total Primary Energy	MJ	2,85E+01	5,50E+00	1,13E-01	0*	2,28E+01	9,22E-02

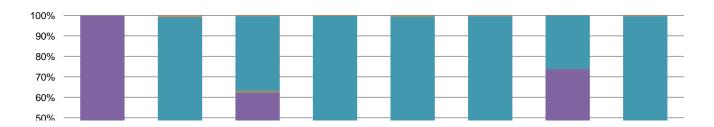

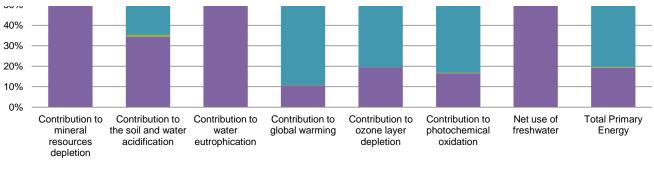

Manufacturing Distribution Installation Use En

nd	of	life	
nu.	UI.	me	

Optional indicators	SEDNA - 1POLE SWITCH - 10AX WITHOUT FRAME WHITE - SDN0100121						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5,05E+01	4,80E+00	1,12E-01	0*	4,55E+01	8,41E-02
Contribution to air pollution	m³	1,85E+02	4,36E+01	3,40E-01	0*	1,40E+02	6,60E-01
Contribution to water pollution	m³	1,37E+02	5,79E+01	1,32E+00	4,21E-02	7,74E+01	7,56E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,99E-04	1,99E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	4,07E+00	1,56E-01	0*	0*	3,92E+00	0*
Total use of non-renewable primary energy resources	MJ	2,44E+01	5,34E+00	1,13E-01	0*	1,88E+01	9,21E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3,90E+00	0*	0*	0*	3,92E+00	0*
Use of renewable primary energy resources used as raw material	MJ	1,68E-01	1,68E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2,36E+01	4,52E+00	1,13E-01	0*	1,88E+01	9,21E-02
Use of non renewable primary energy resources used as raw material	MJ	8,21E-01	8,21E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1,09E+00	9,68E-01	0*	0*	3,94E-02	8,28E-02
Non hazardous waste disposed	kg	7,83E-01	5,70E-01	2,84E-04	0*	2,13E-01	2,83E-04
Radioactive waste disposed	kg	1,78E-04	1,40E-04	2,02E-07	0*	3,76E-05	4,42E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	5,02E-02	6,37E-03	0*	0*	0*	4,38E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	8,71E-04	1,11E-04	0*	0*	0*	7,60E-04
Exported Energy	MJ	5,92E-06	0*	0*	5,92E-06	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6, database version 2016-11.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00208-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH25	Supplemented by	PSR-0005-ed2-EN-2016 03 29

SCHN-00208-V01.01-EN - PEP ECOPASSPORT® - SEDNA - 1POLE SWITCH - 10AX WITHOUT FRAME WHITE

Date of issue	06/2017	Information and reference documents	www.pep-ec	opassport.org				
		Validity period	5 years					
Independent verification of	Independent verification of the declaration and data, in compliance with ISO 14025 : 2010							
Internal	External X							
The PCR review was cond	ucted by a panel of experts	chaired by Philippe Osset (SOLINNEN)		PEP				
The elements of the preser	nt PEP cannot be compared	with elements from another program.		eco				
Document in compliance w declarations »	ith ISO 14025 : 2010 « Envi	ironmental labels and declarations. Type III envi	ironmental	PASS PORT.				

Schneider Electric Industries SAS

Country Customer Care Center

35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00208-V01.01-EN

Published by Schneider Electric

© 2016 - Schneider Electric - All rights reserved

06/2017